




lindab | we simplify construction




Lindab **Manual**

Type L-LT












 EN 12604
 EN 12453
 EN 13241

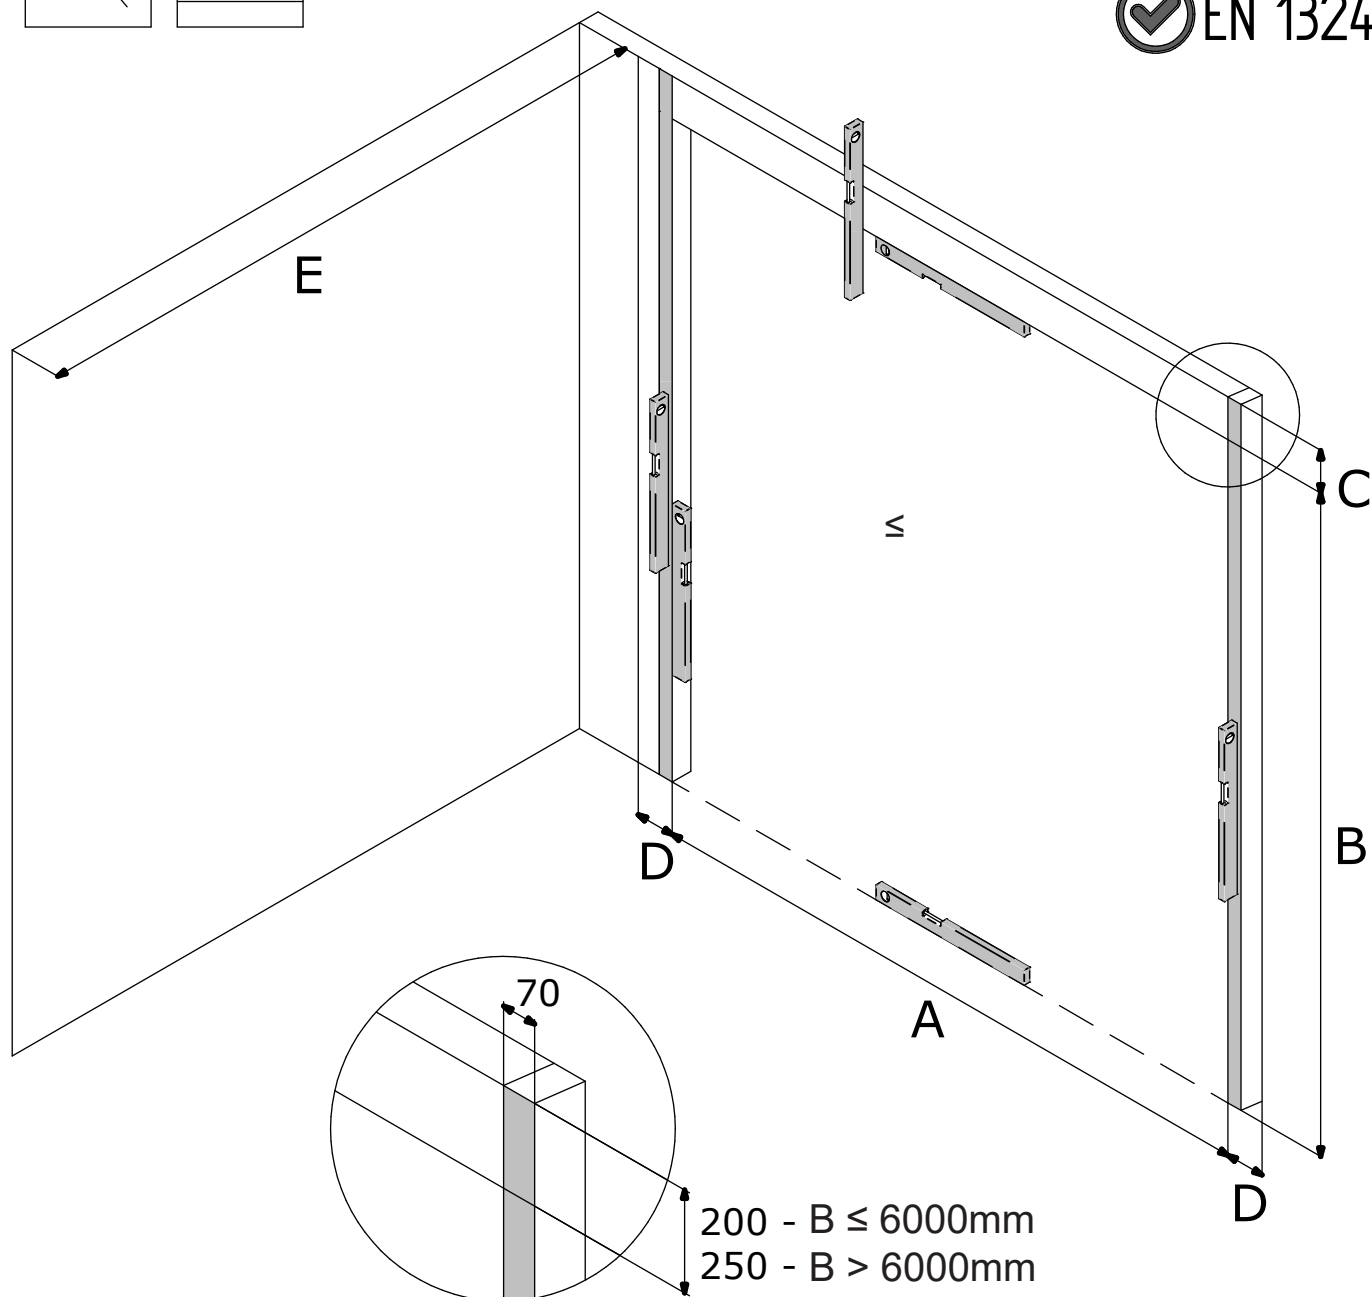


	A	B	C	D	E
	B	H	O	Sv/Sh	D
DK	Bredde	Højde	Overhøjde	Sideplads	Rumdybde
SE	Bredd	Höjd	Överhöjd	Sidoplats	Djupmått
EN	Day Light Width	Day Light Height	Free Head Room	Free Side Room	Free Mounting Depth
DE	Tageslichtbreite	Tageslichtehöhe	Sturzfreiraum	Freie Seitenraum	Freie Einbautiefe
NL	Dagmaat breedte	Dagmaat hoogte	Vrije bovenruimte	Vrije zijruimte	Inbouwdiepte


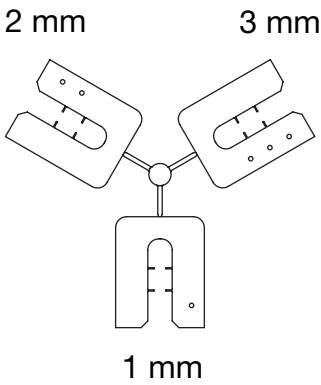
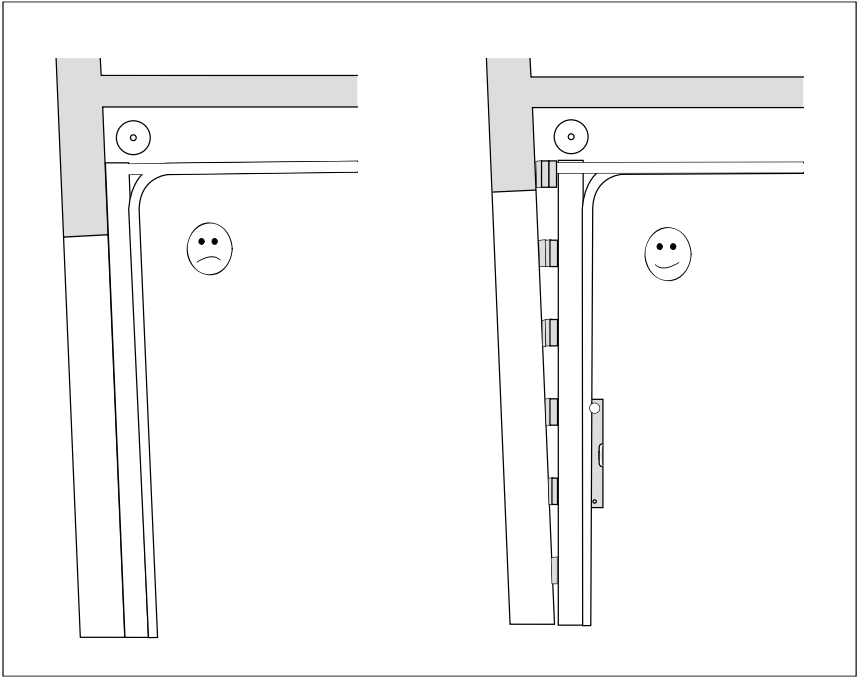
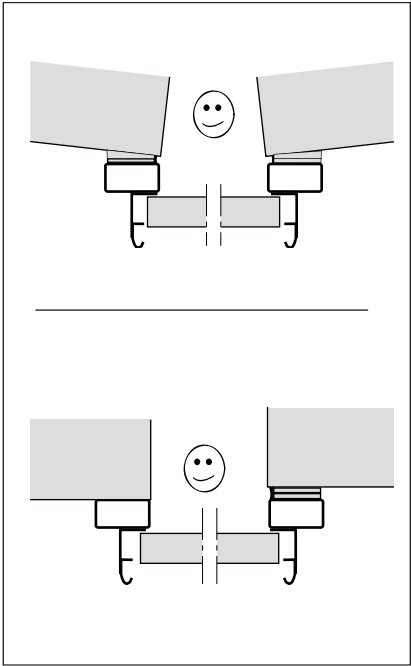
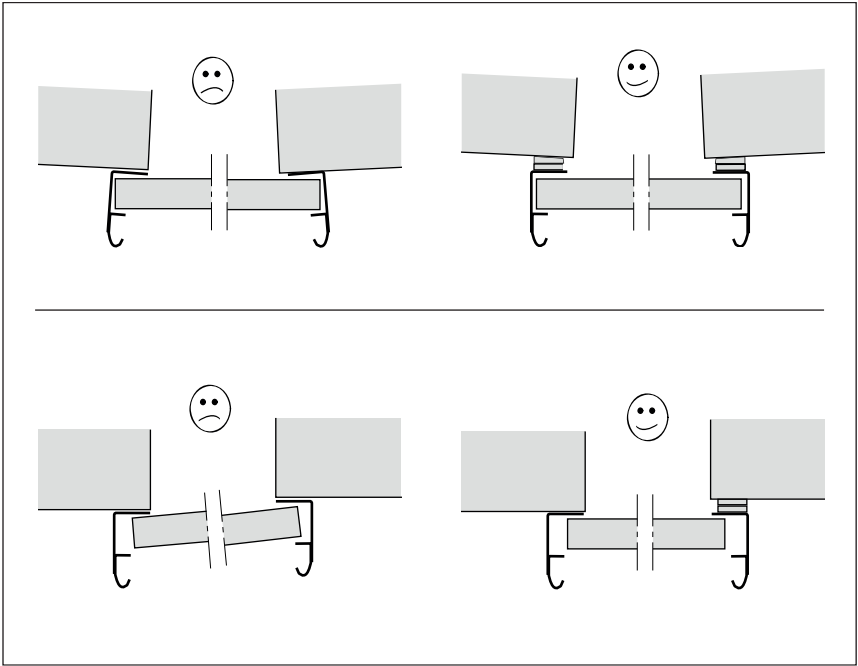


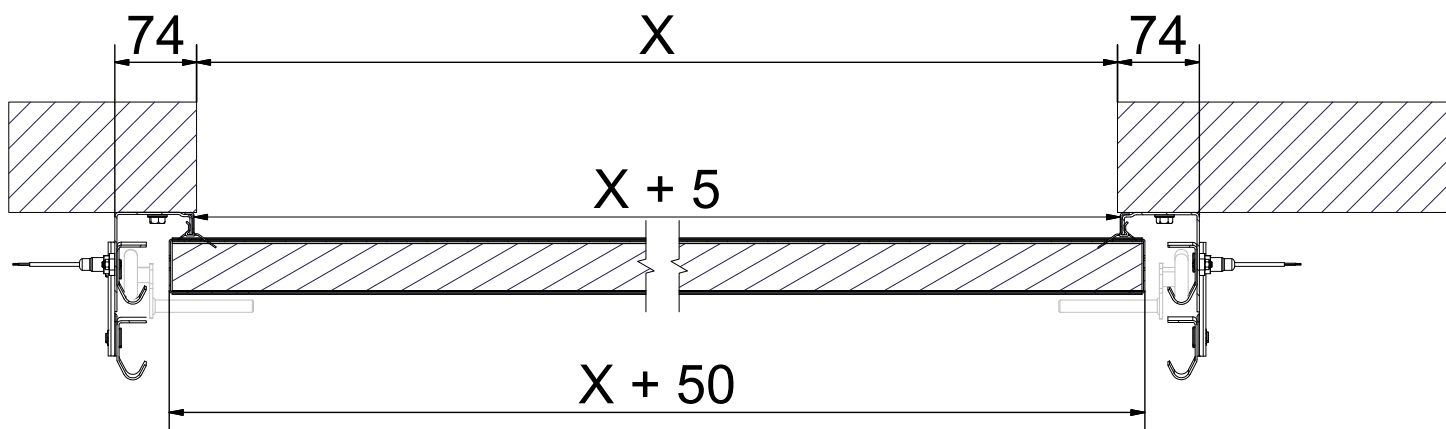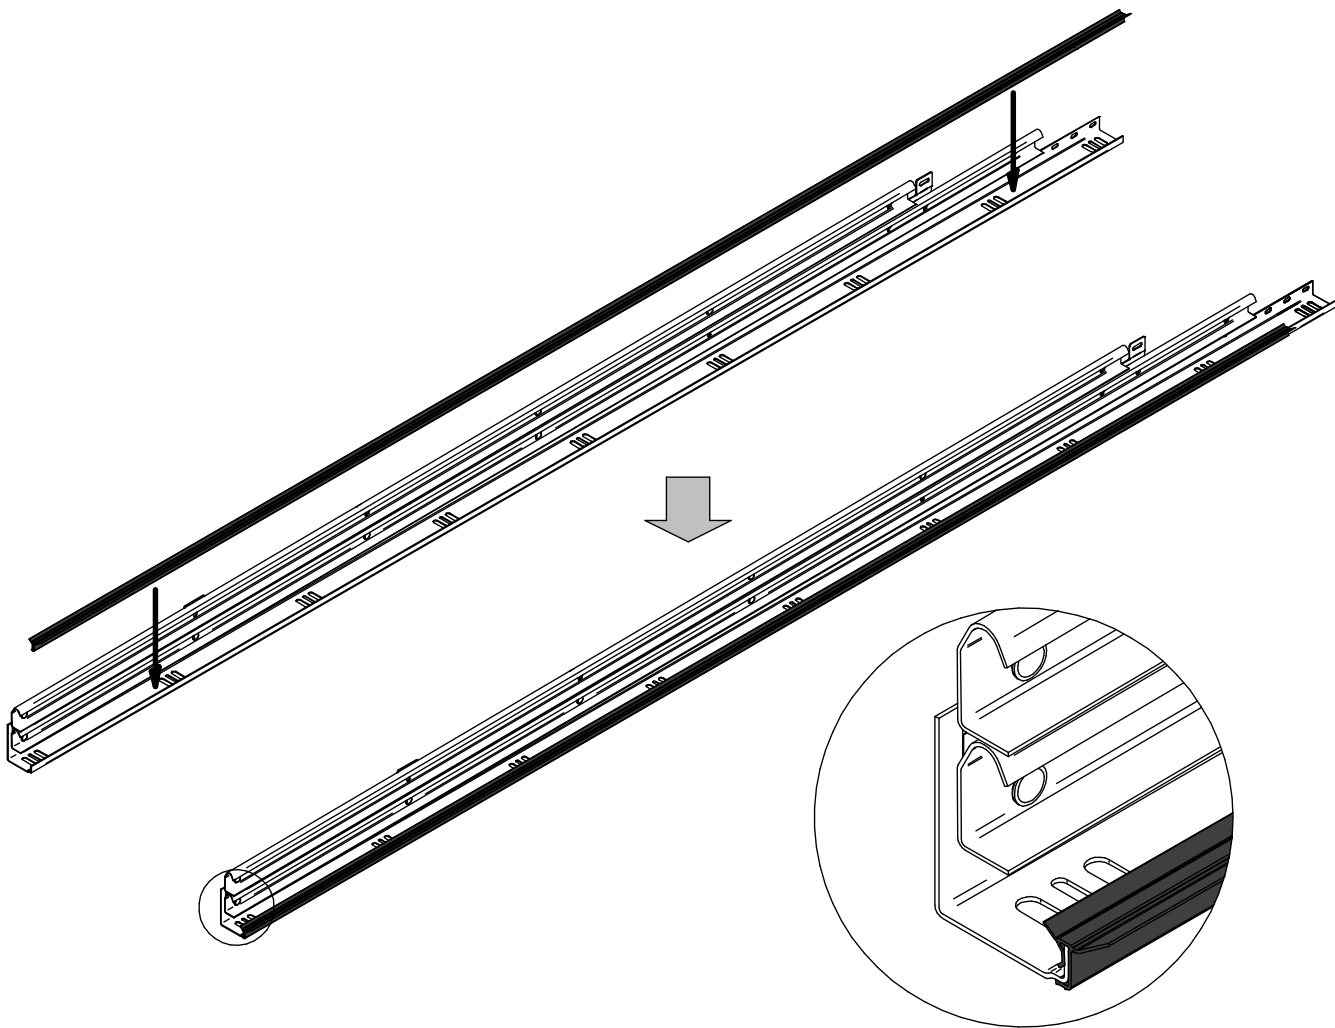



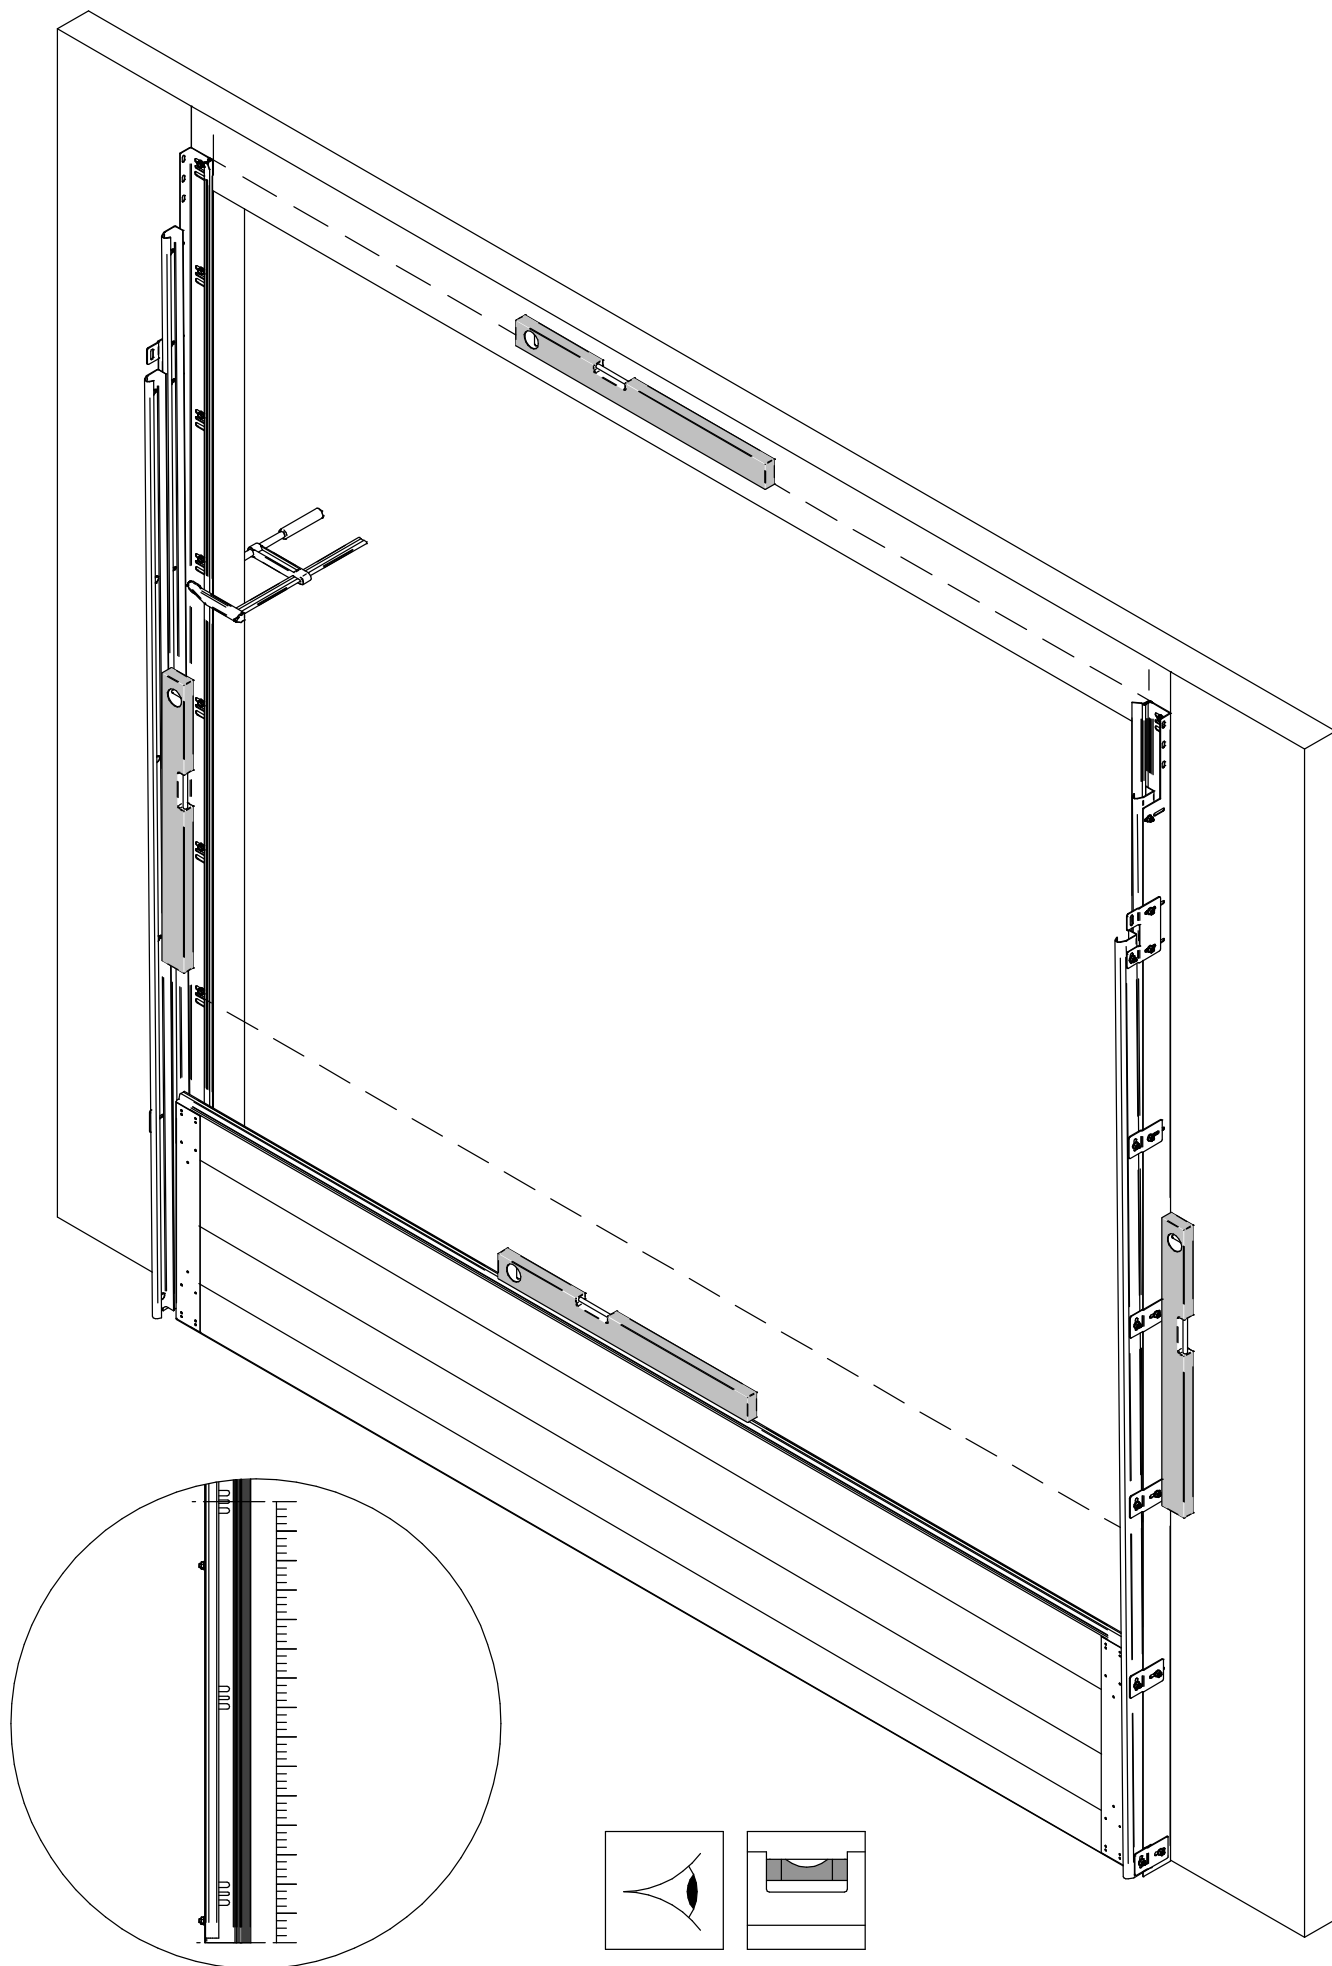


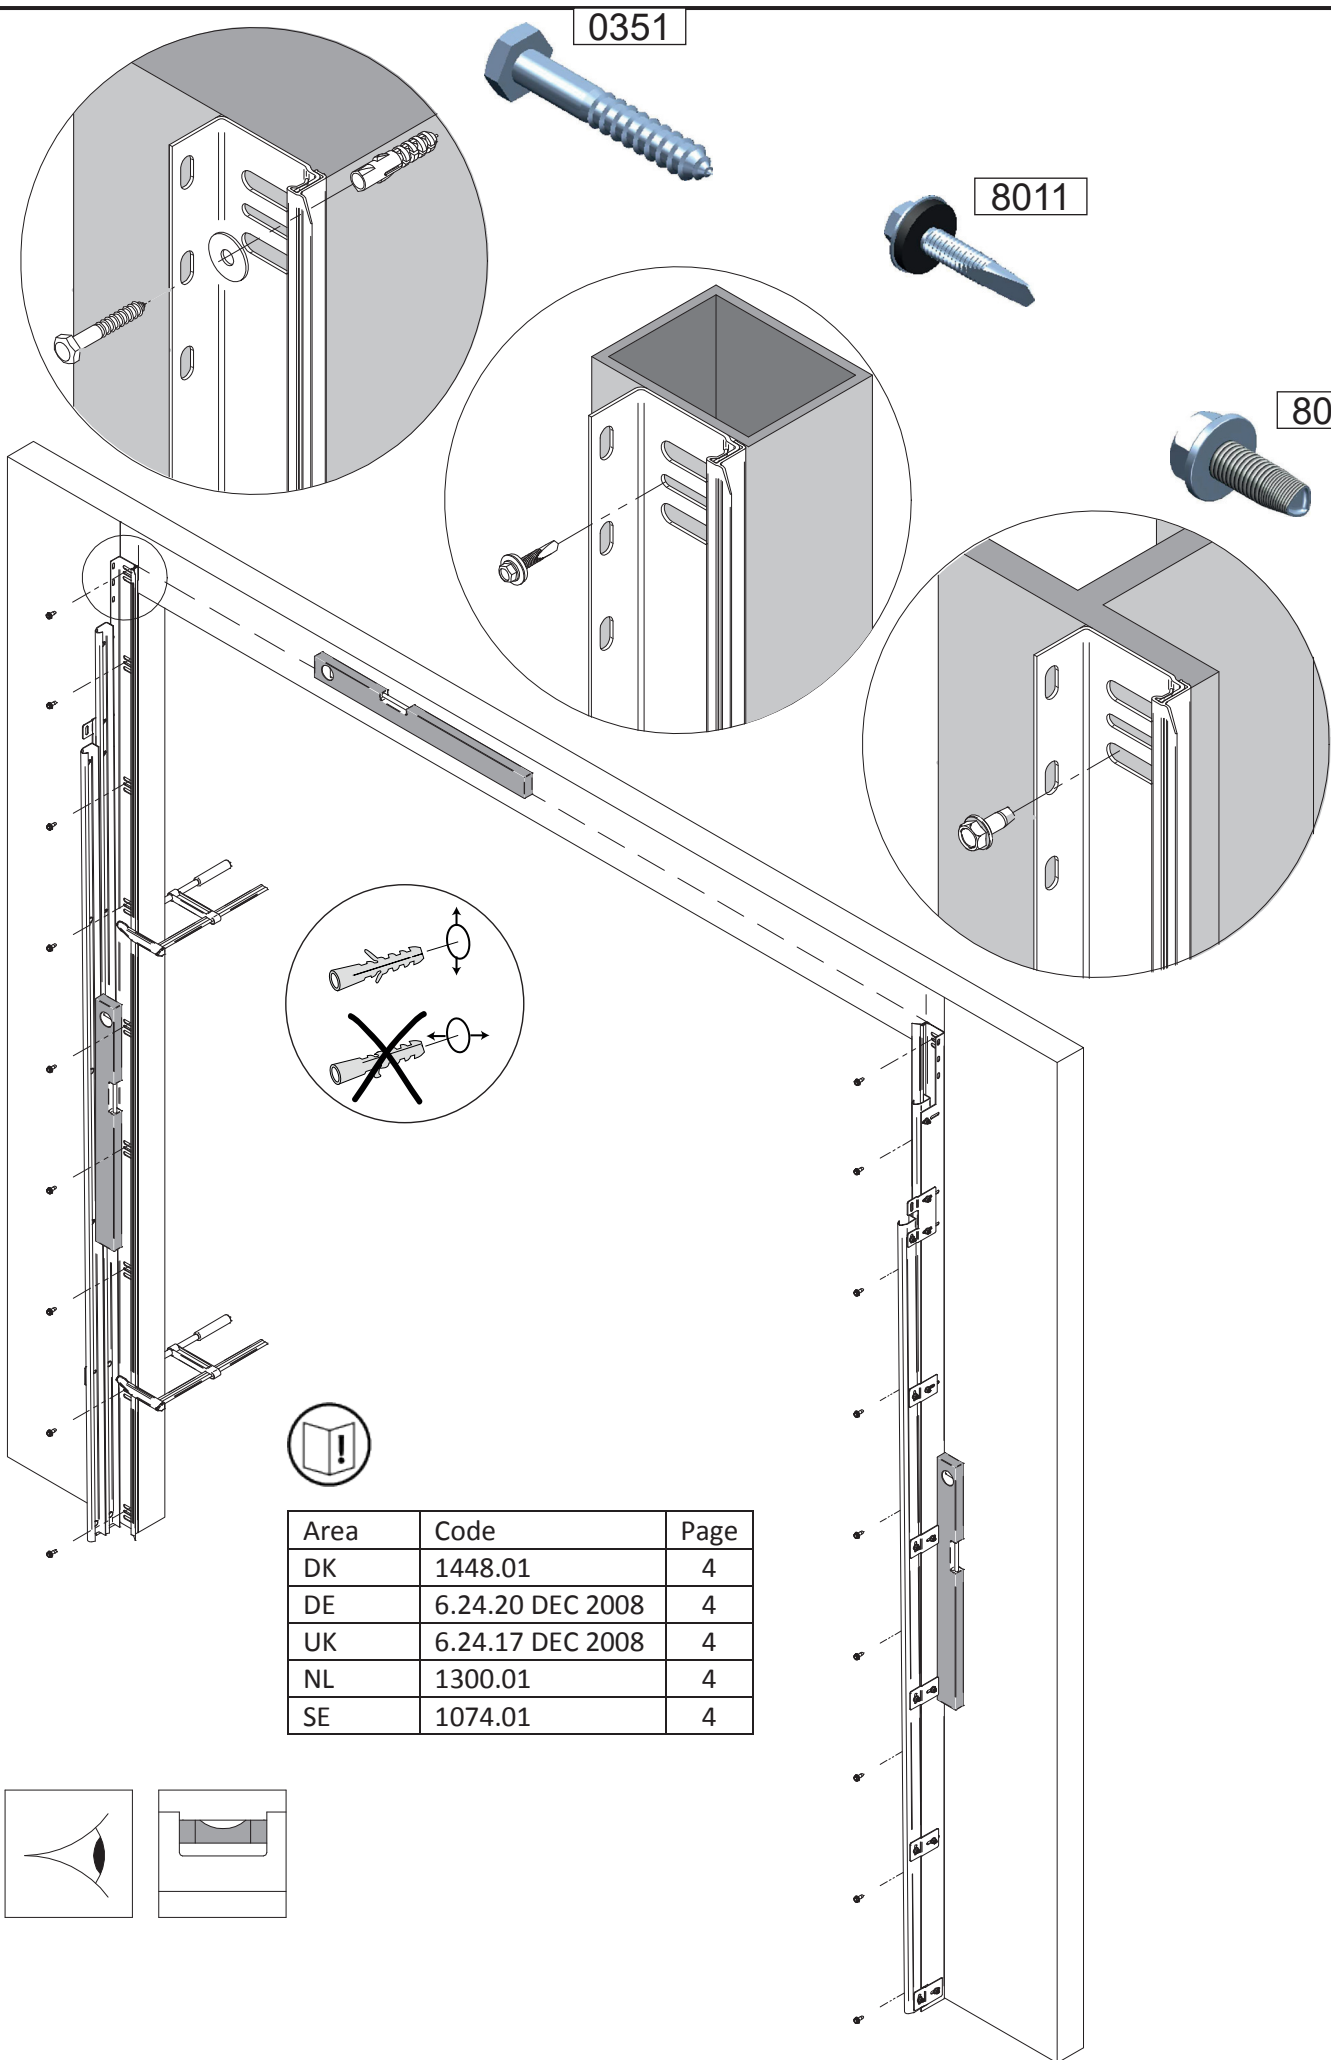



Area	Code	Page
DK	1448.01	4
DE	6.24.20 DEC 2008	4
UK	6.24.17 DEC 2008	4
NL	1300.01	4
SE	1074.01	4

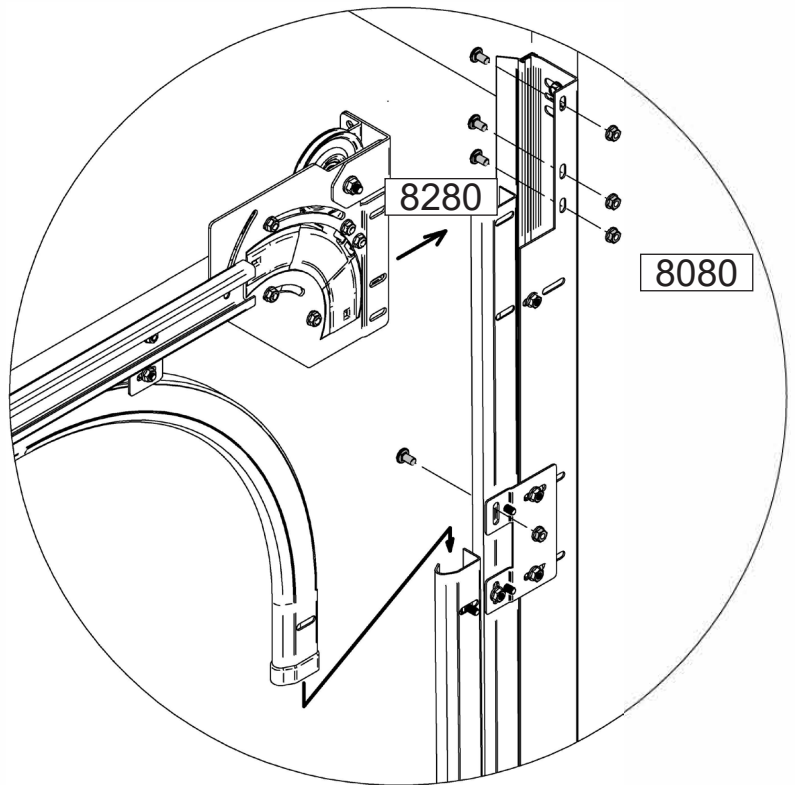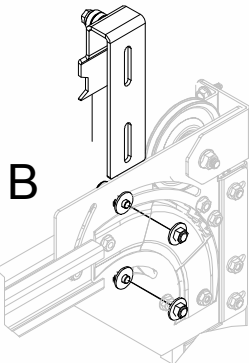
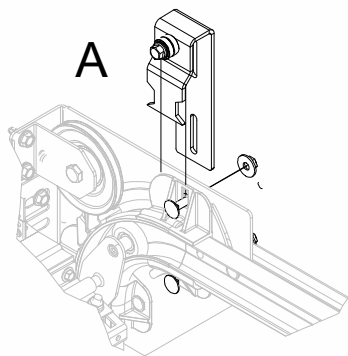
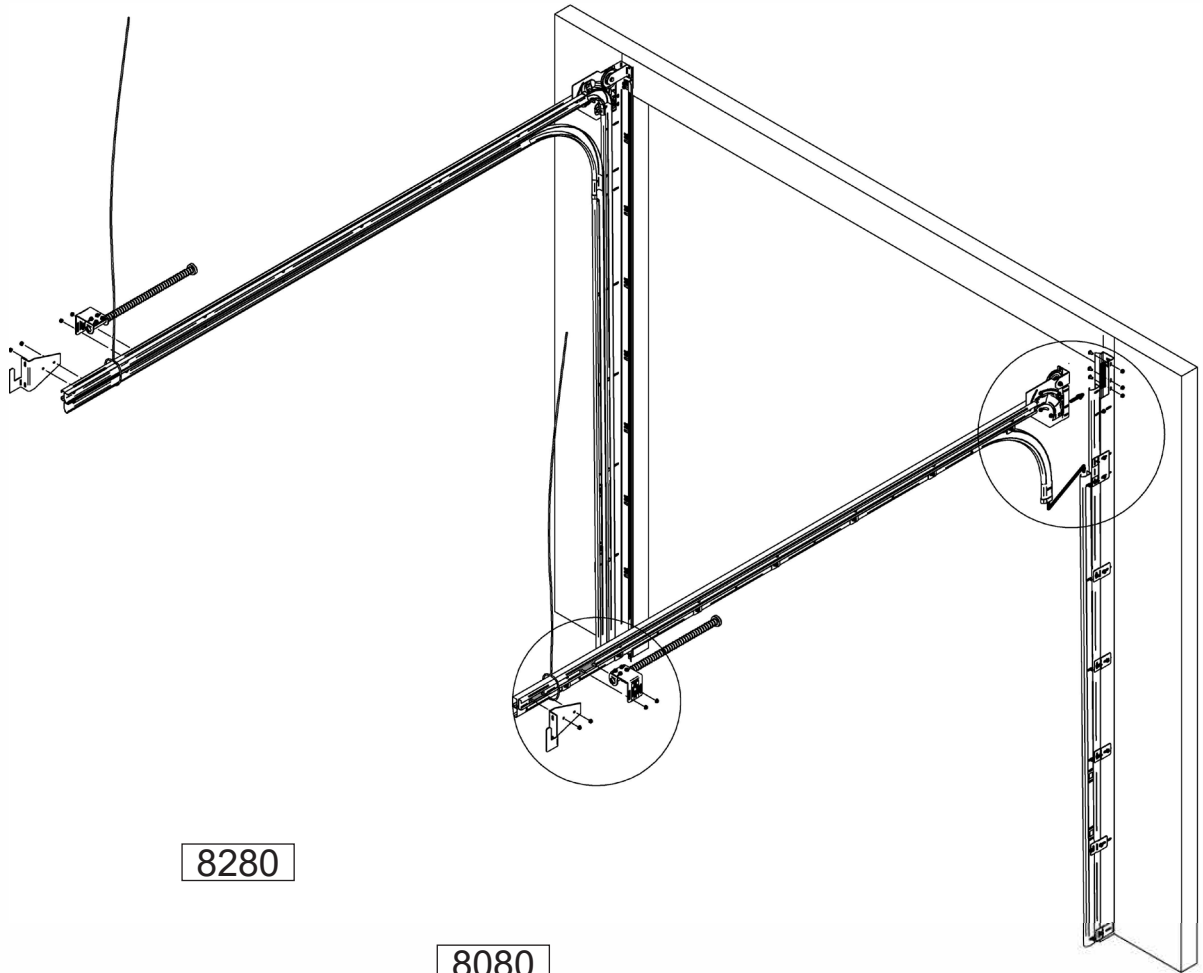


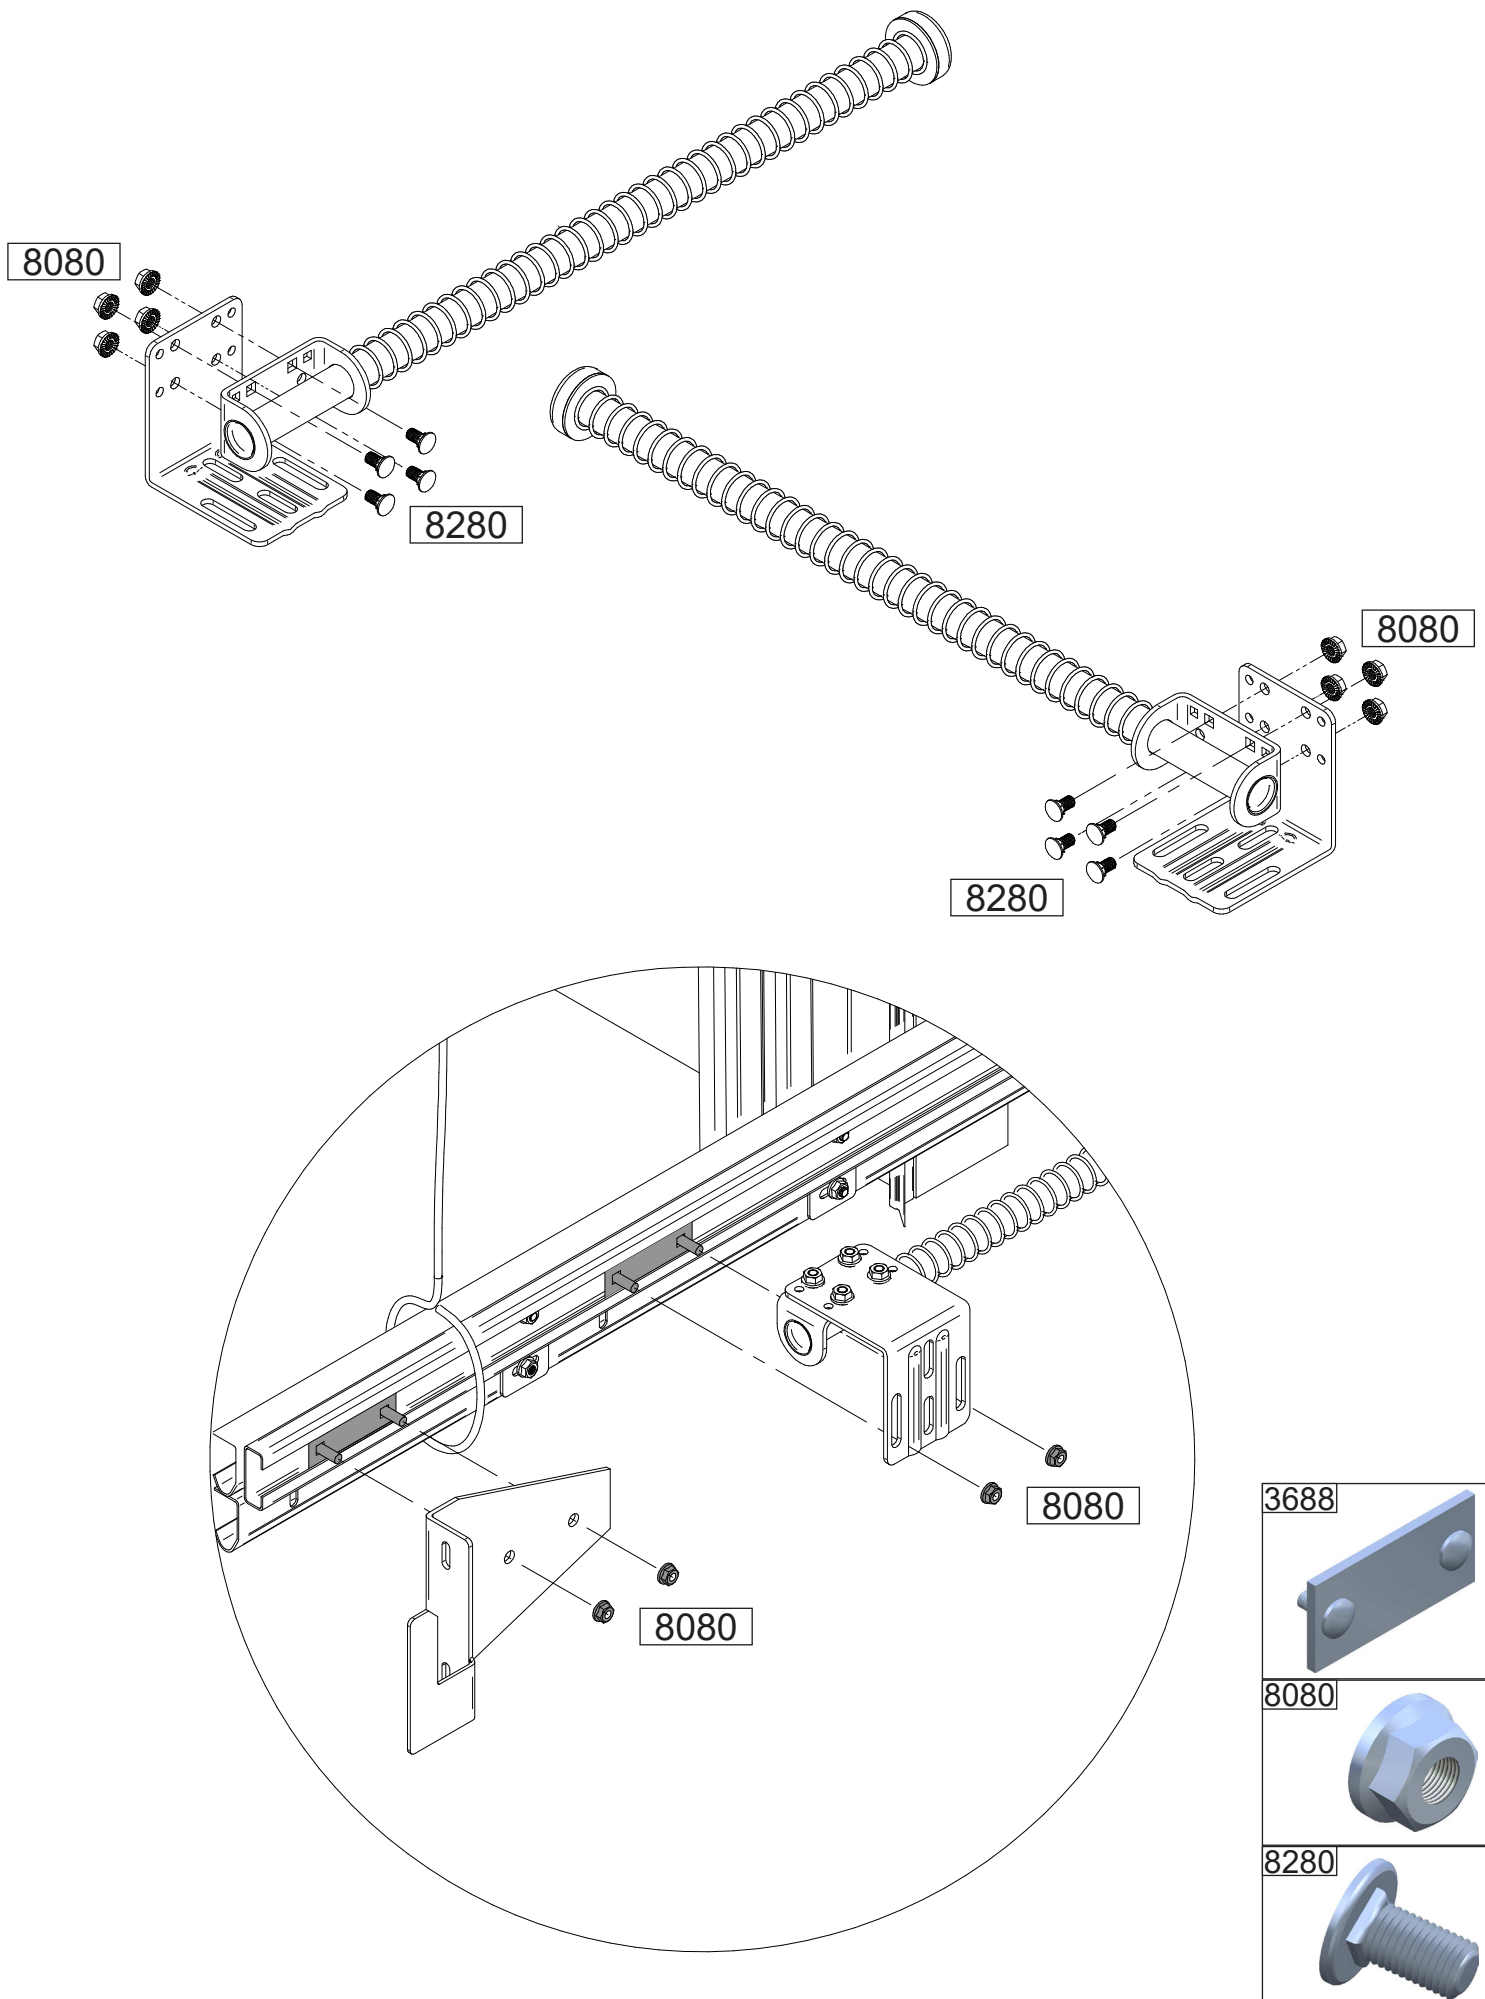


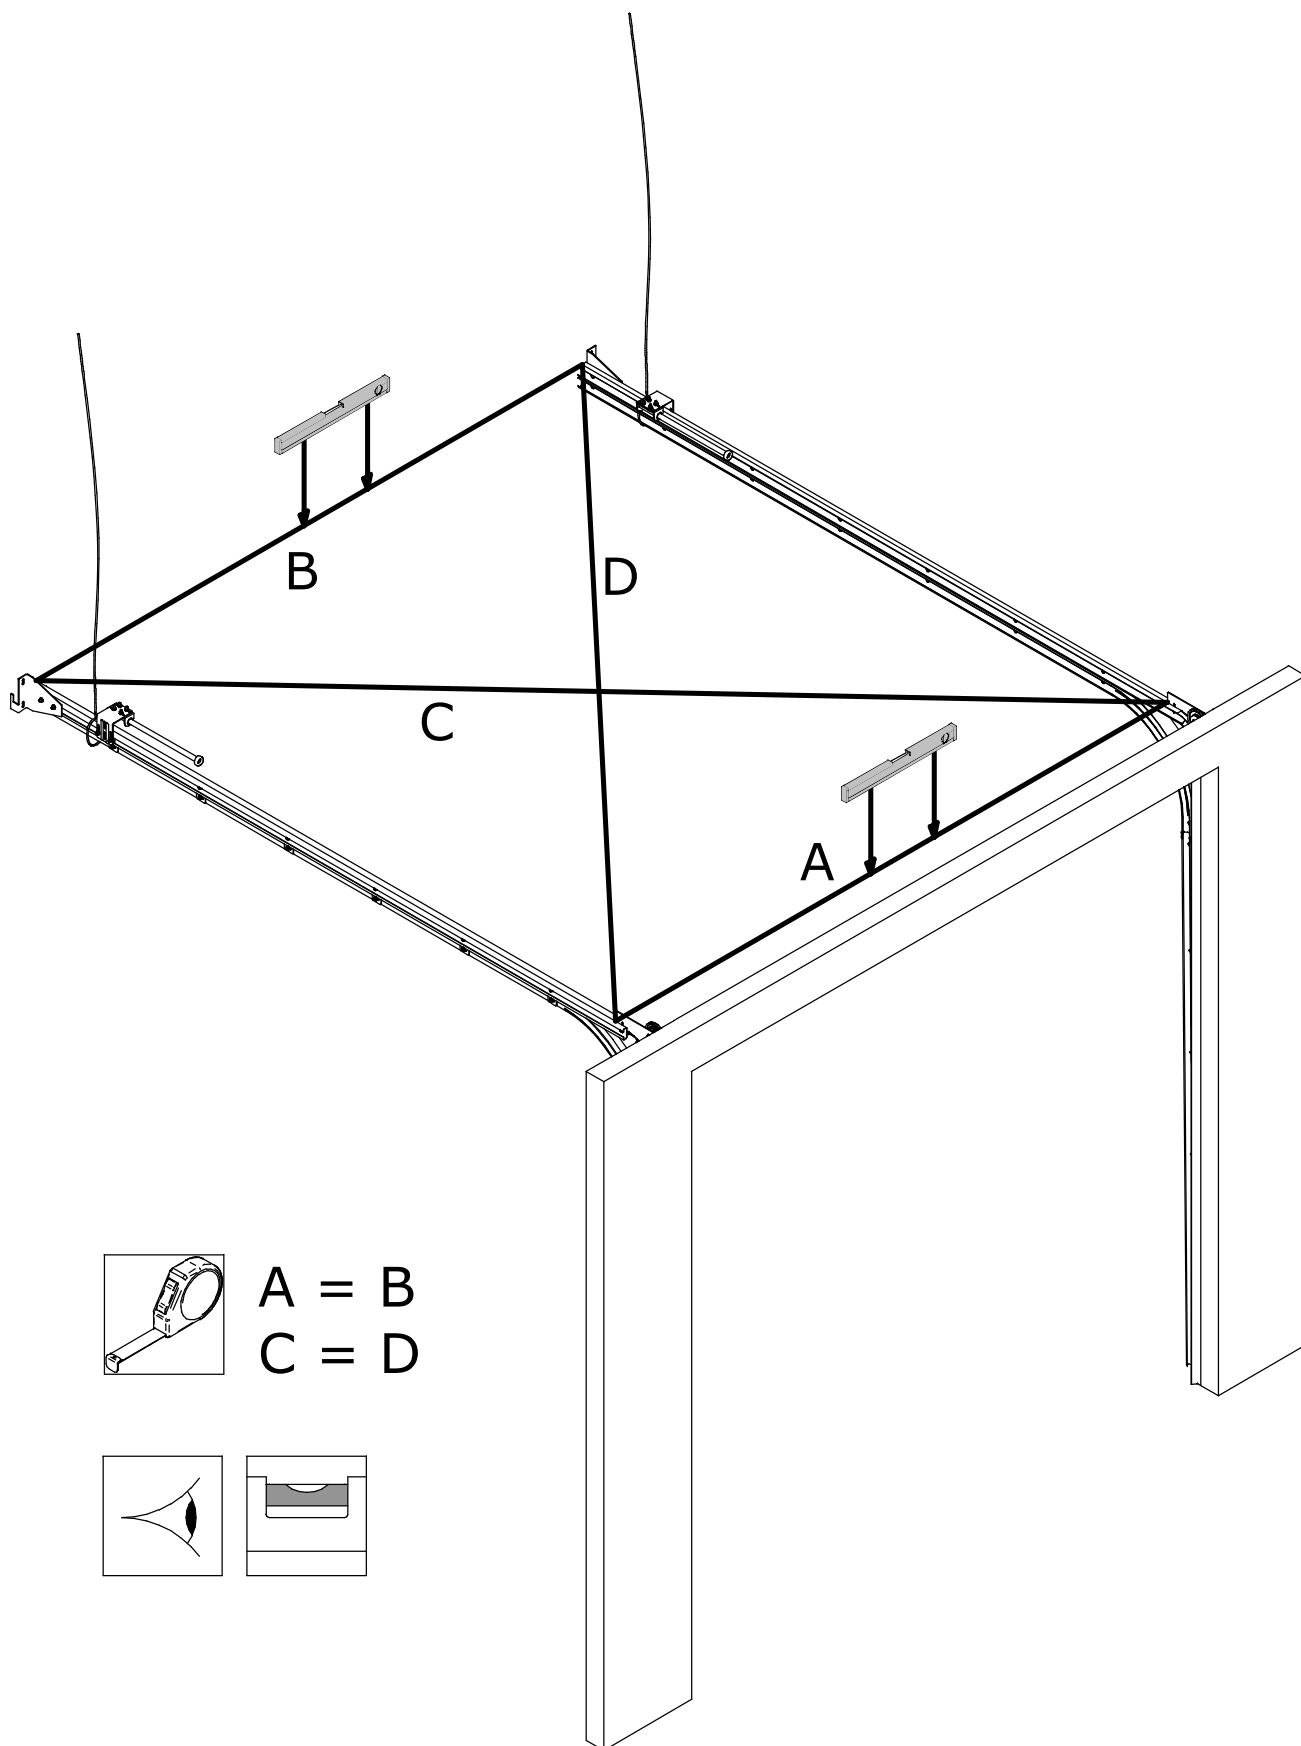





$A = B$
 $C = D$









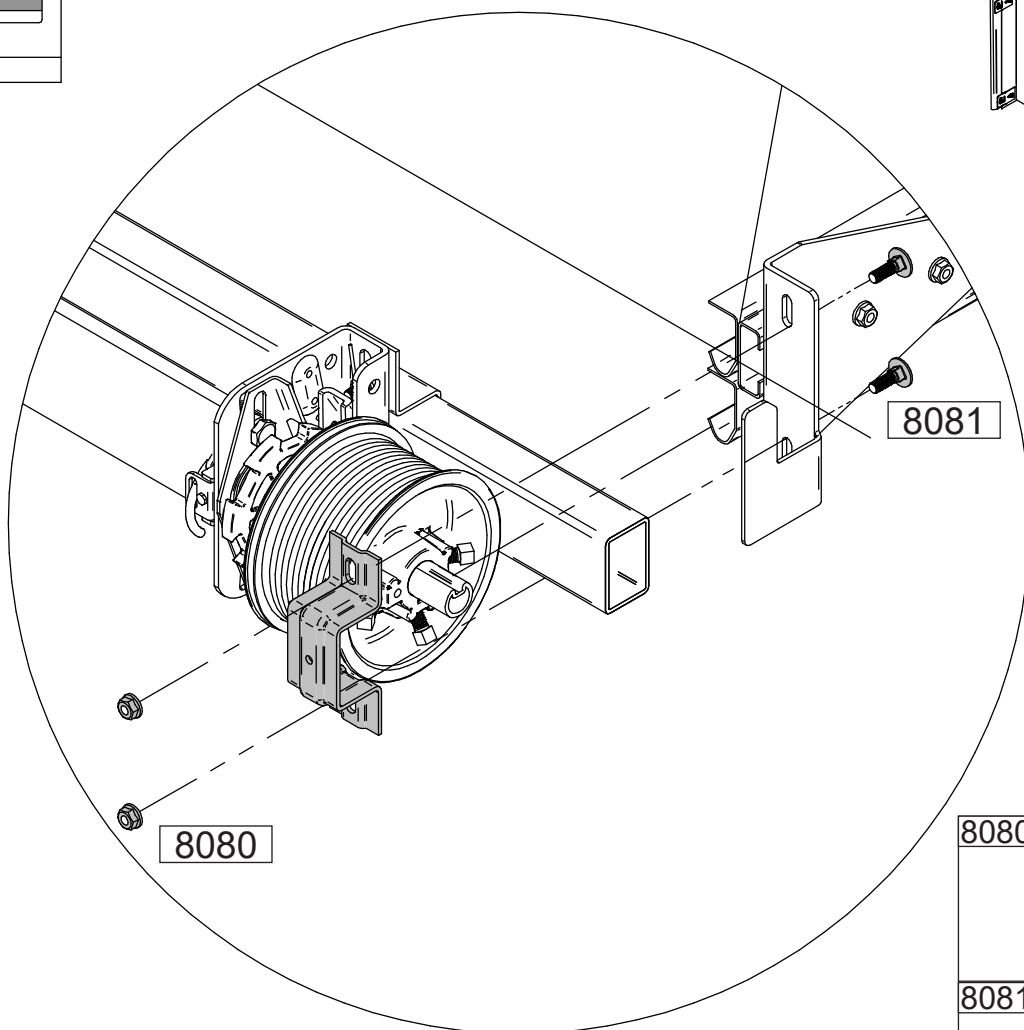
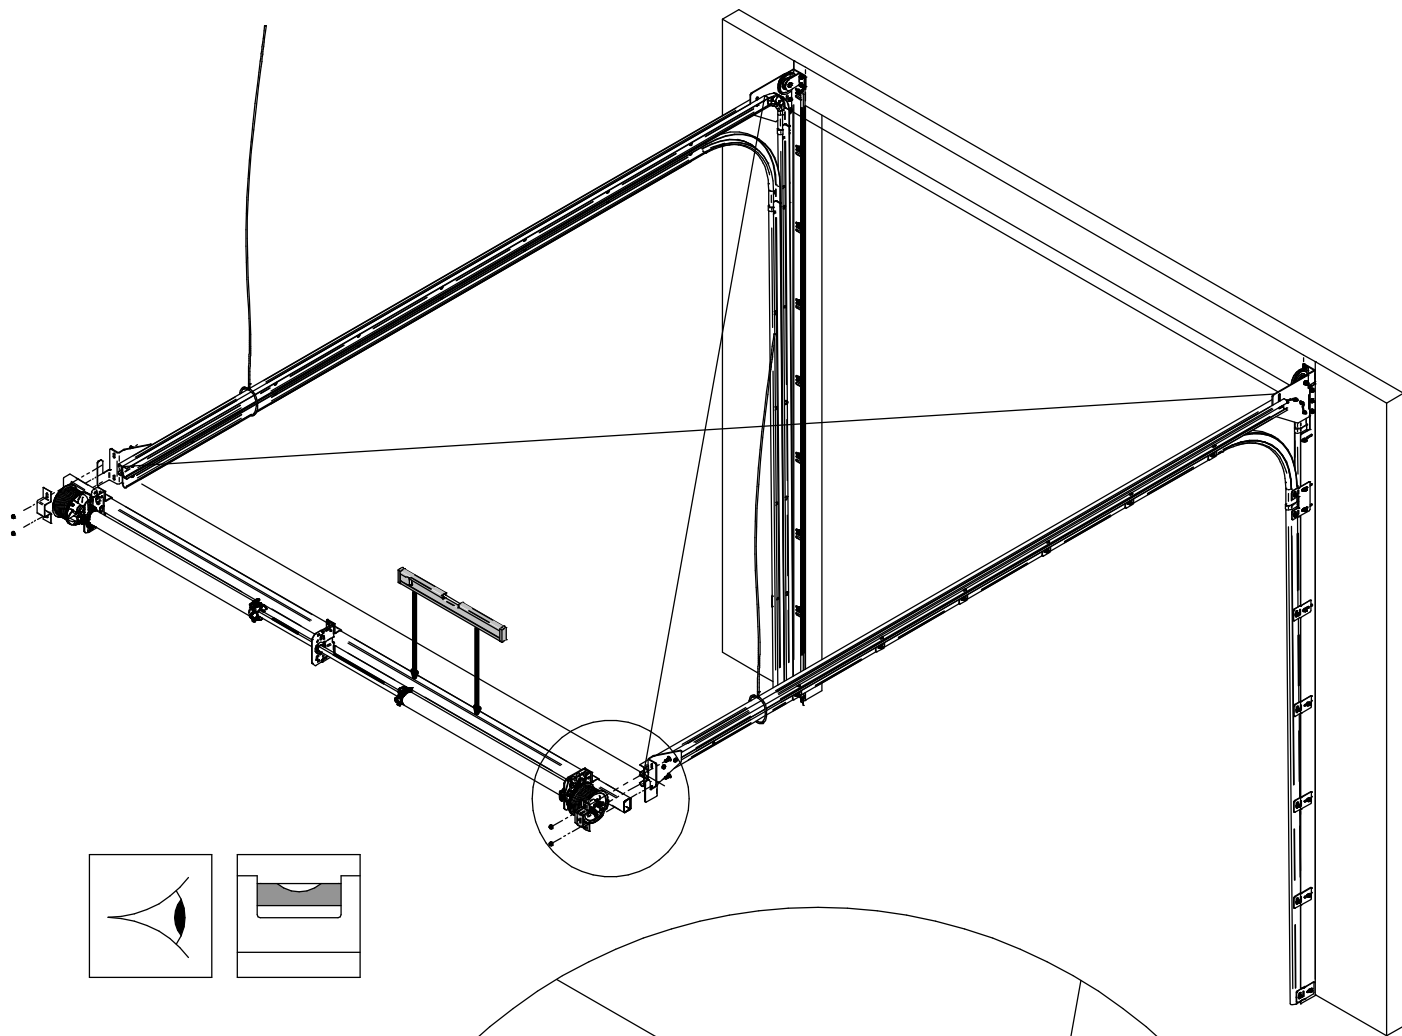


DLW > 3999 mm

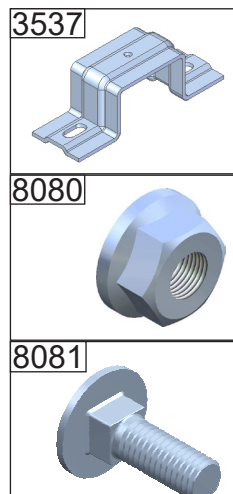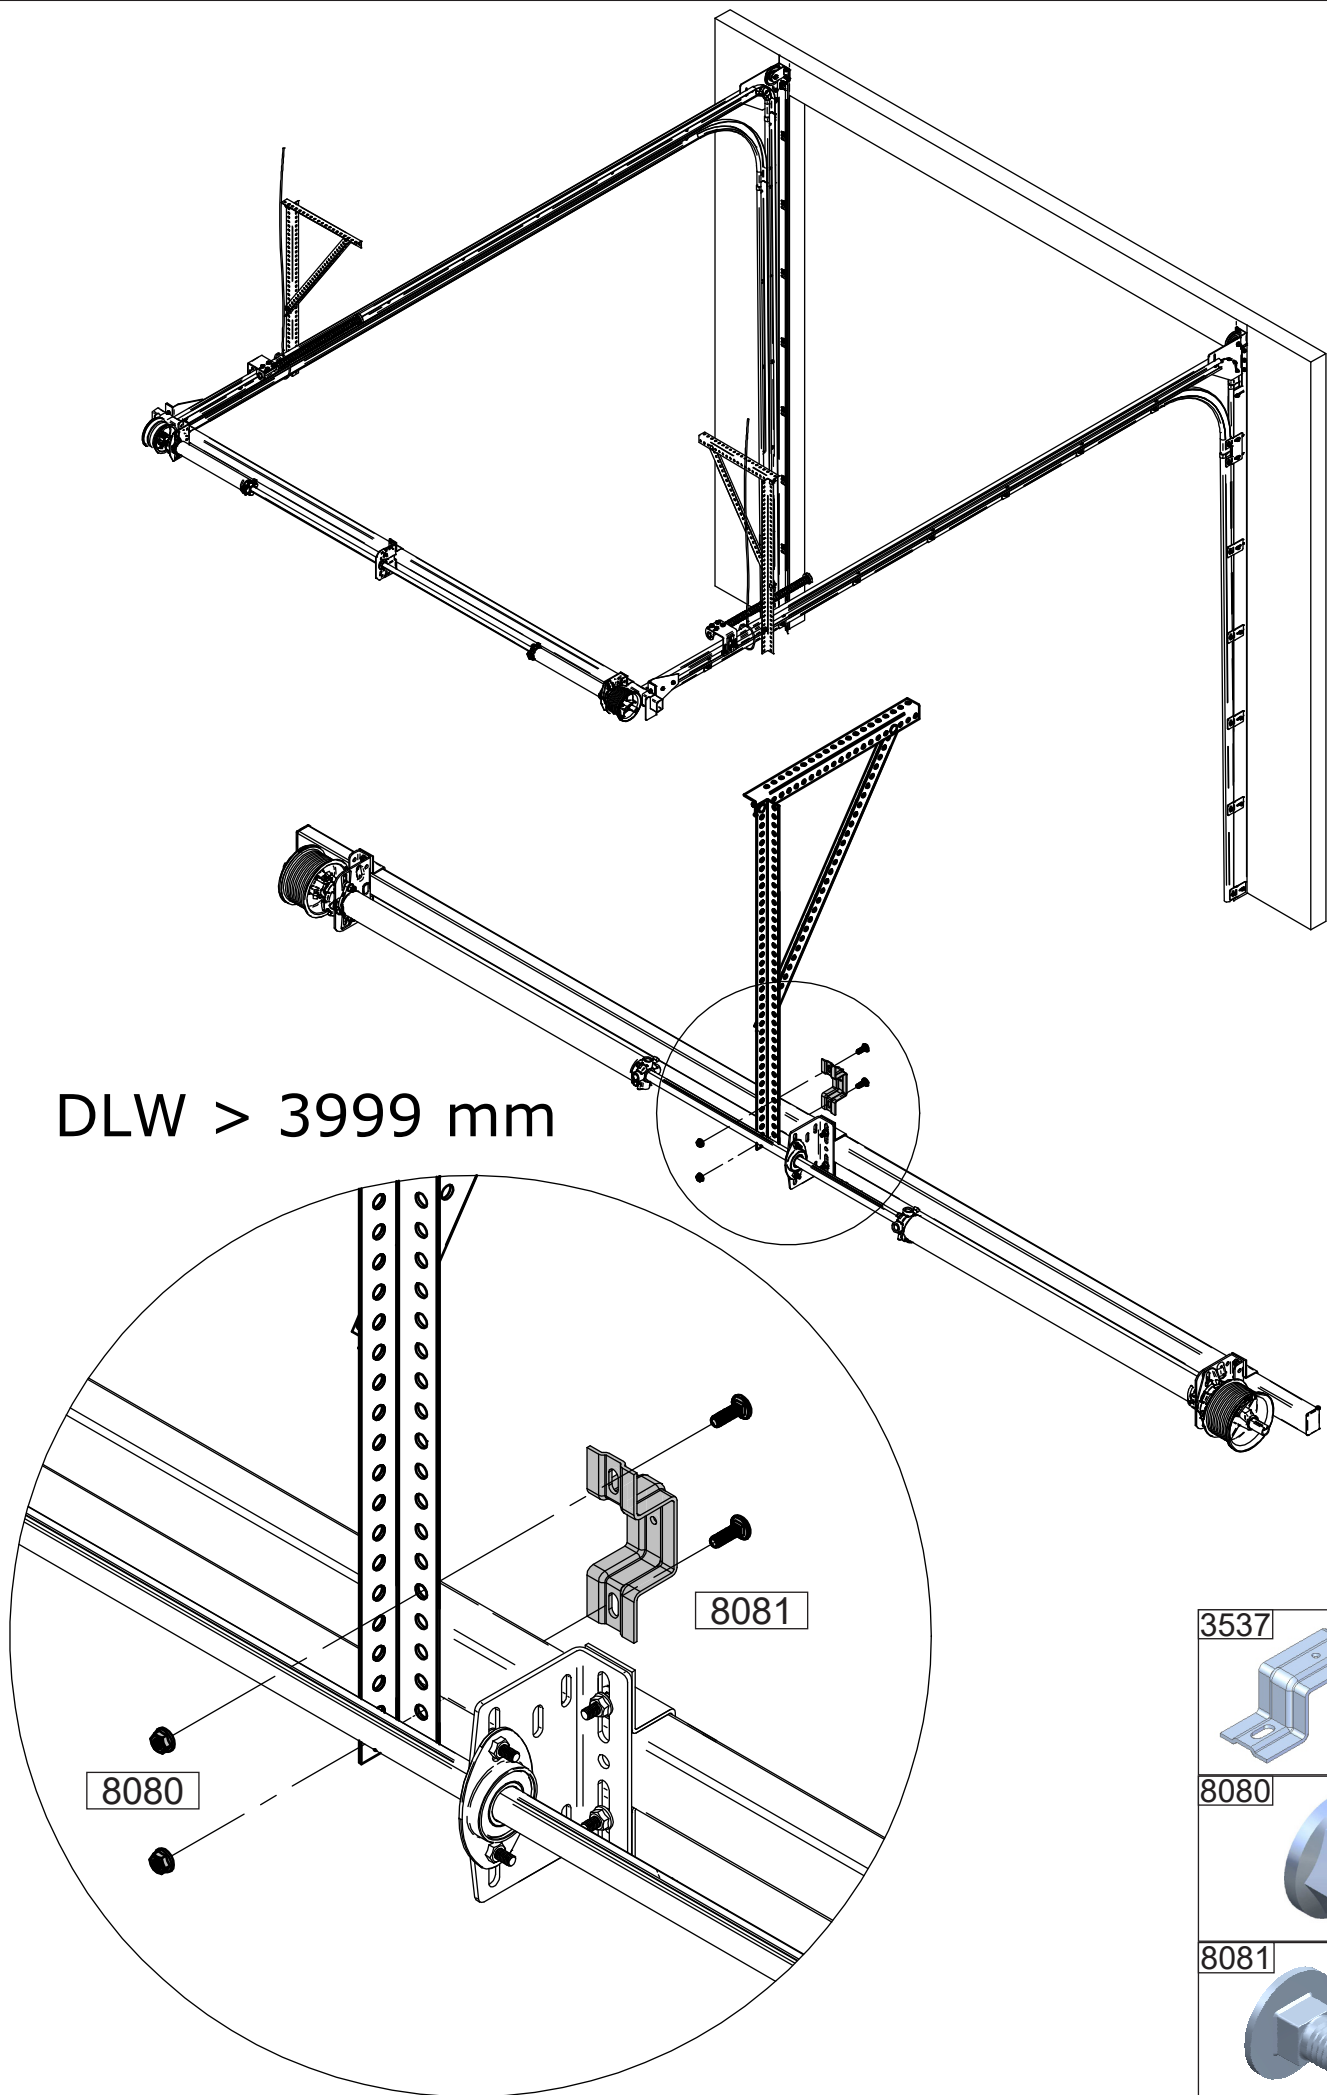






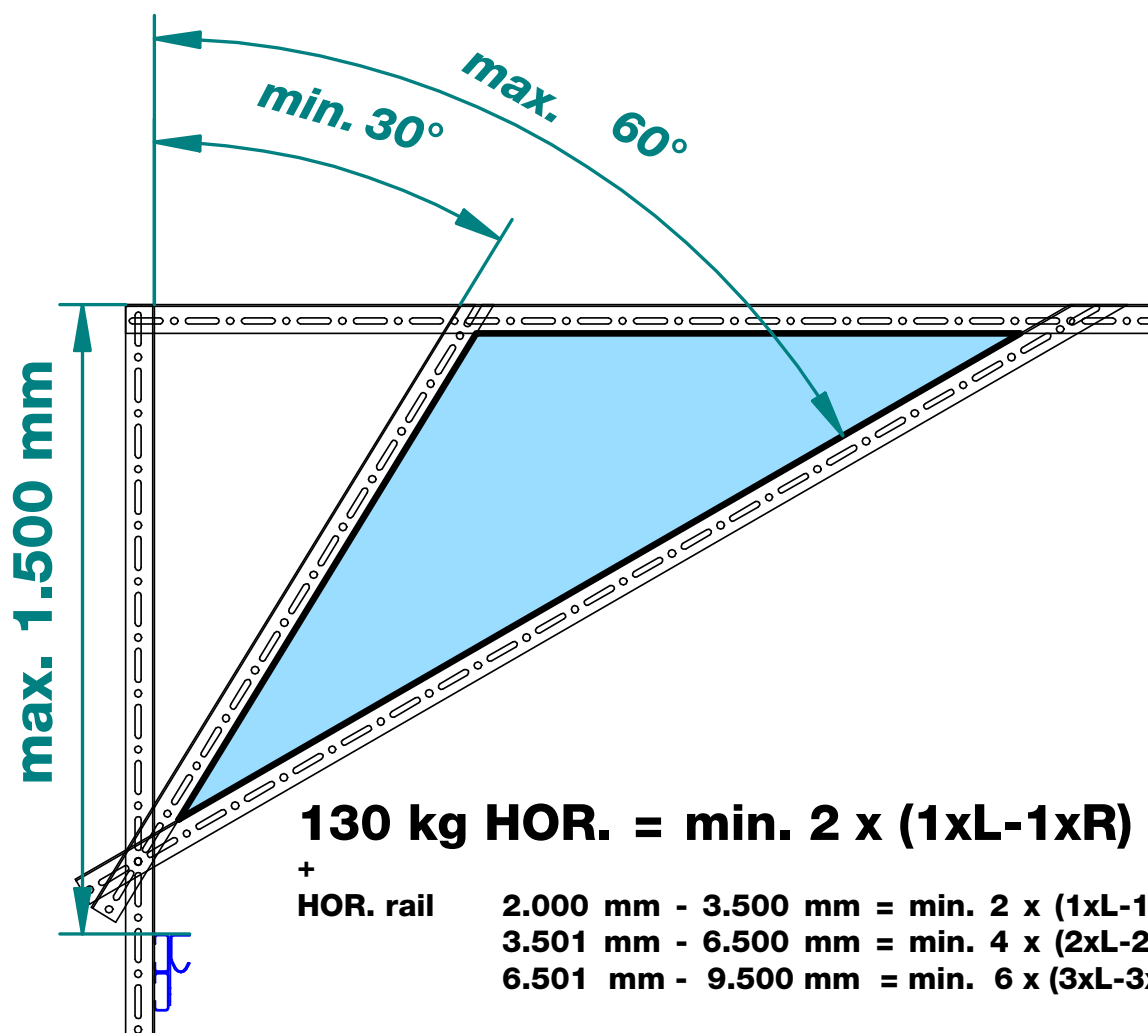
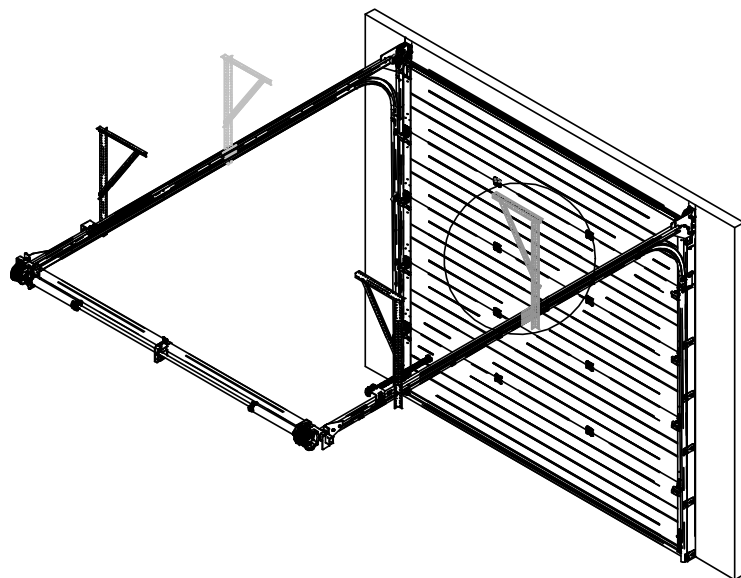
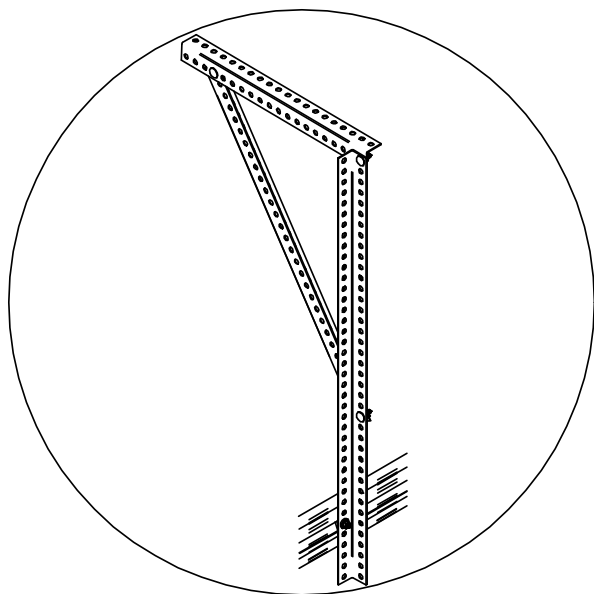


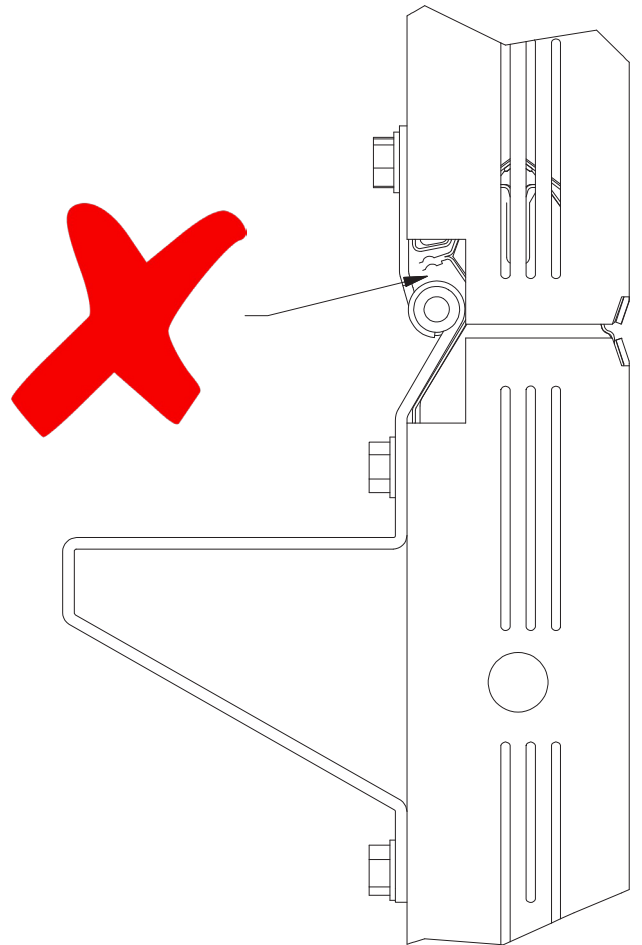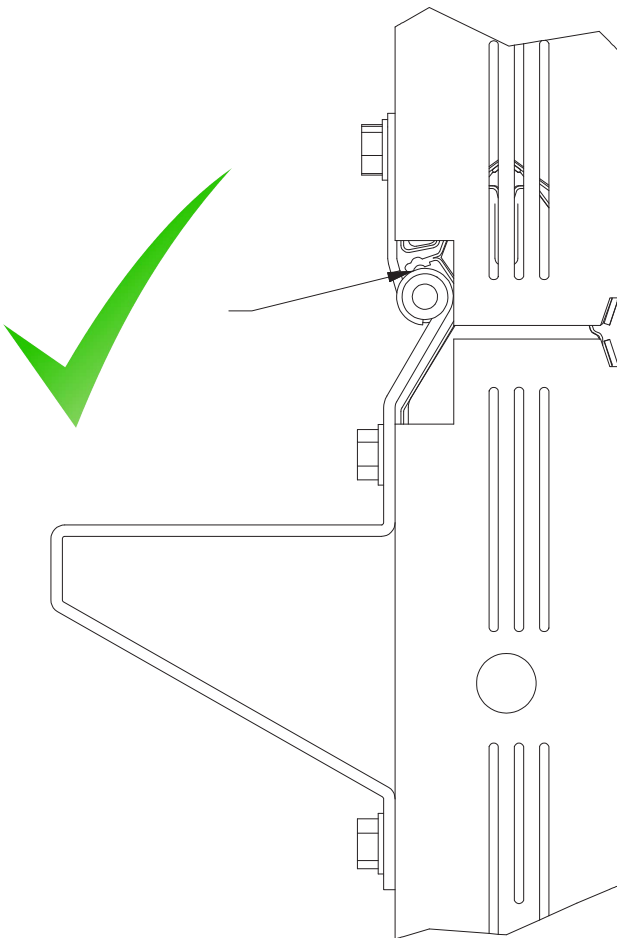

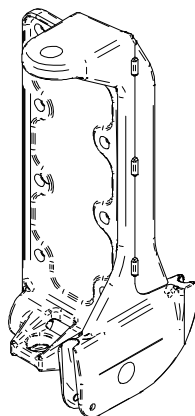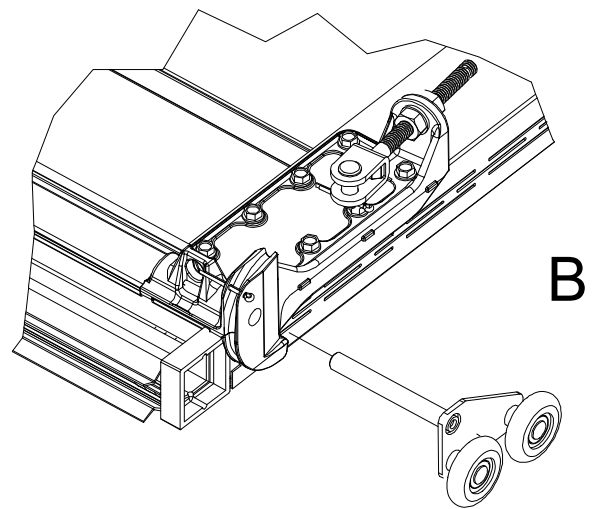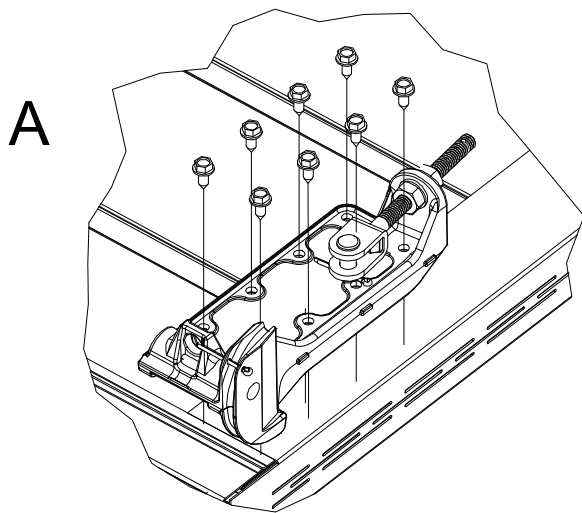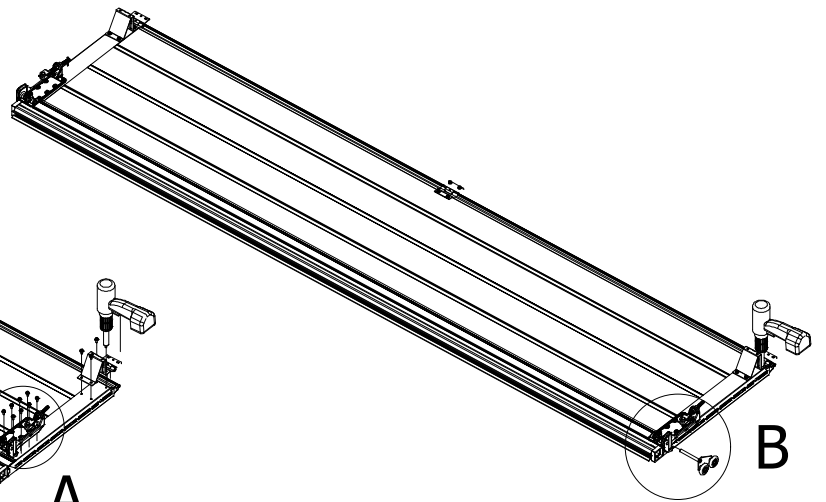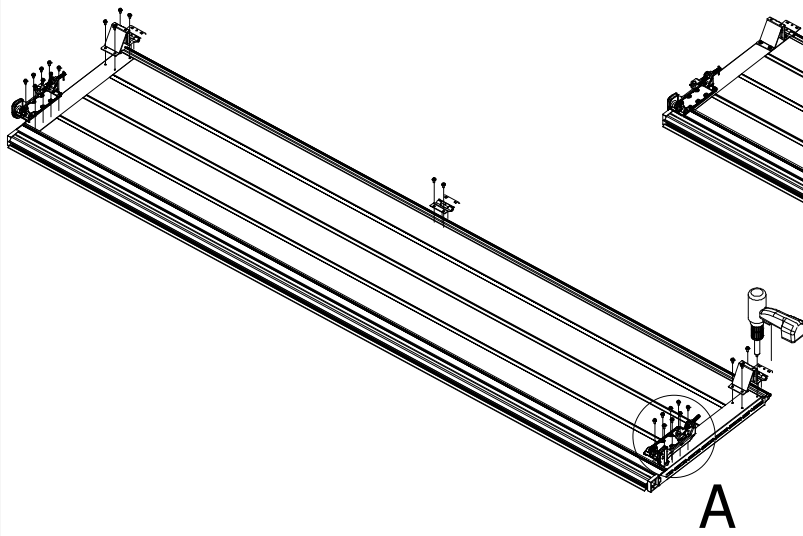



3812





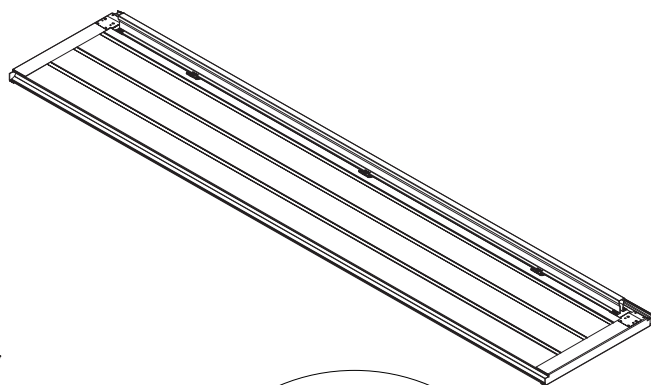
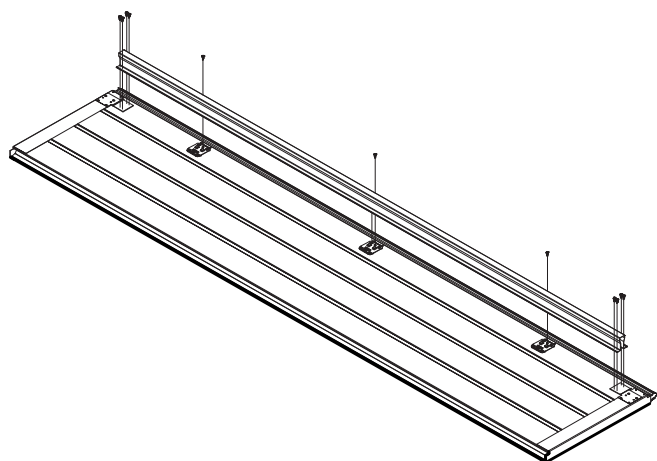
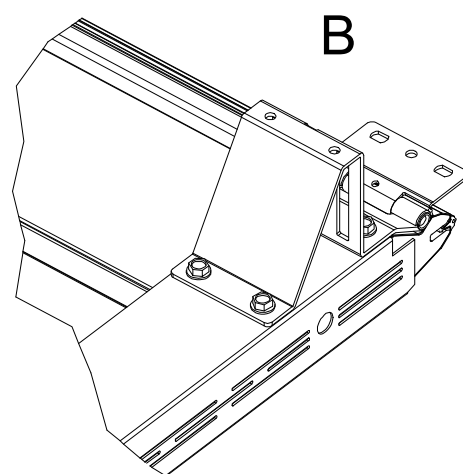
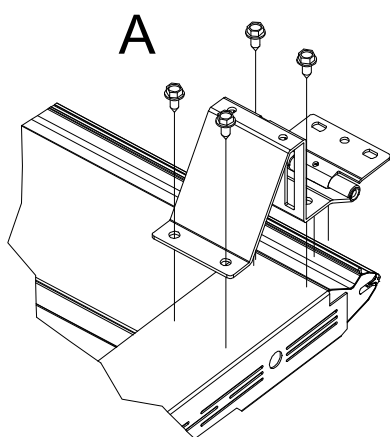
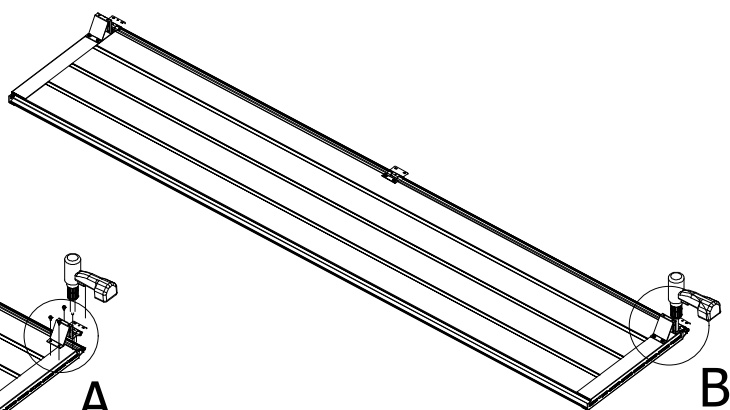
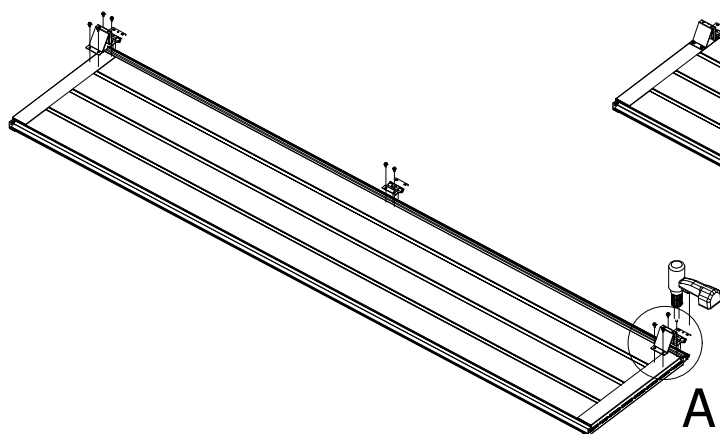







DLW $\geq$ 6000 mm

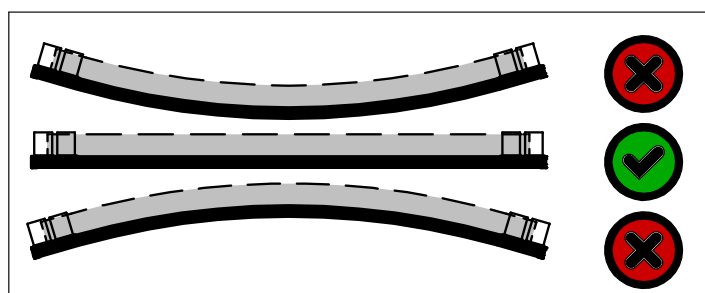
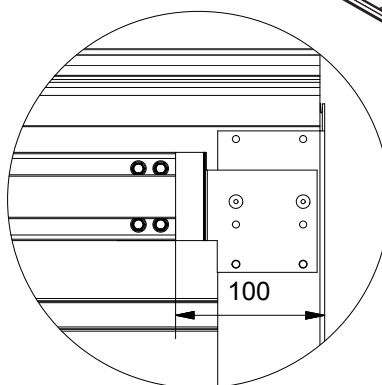





3812








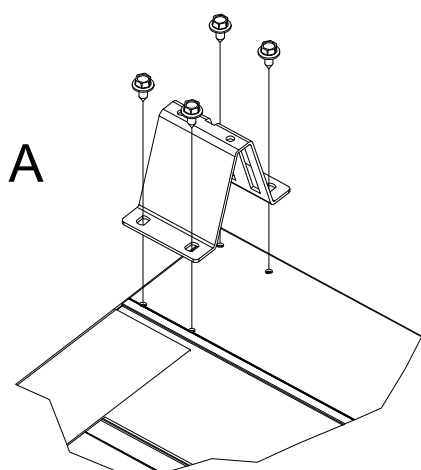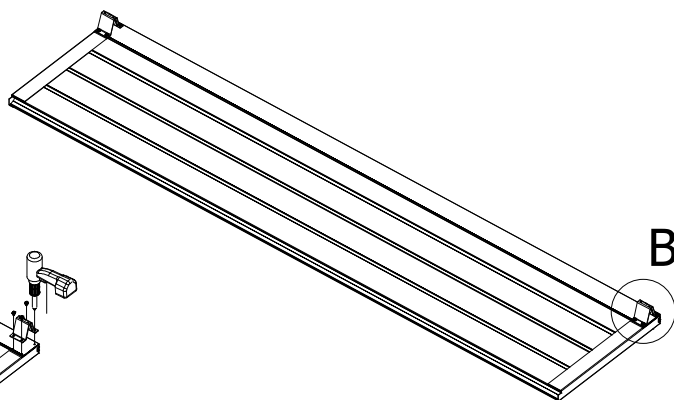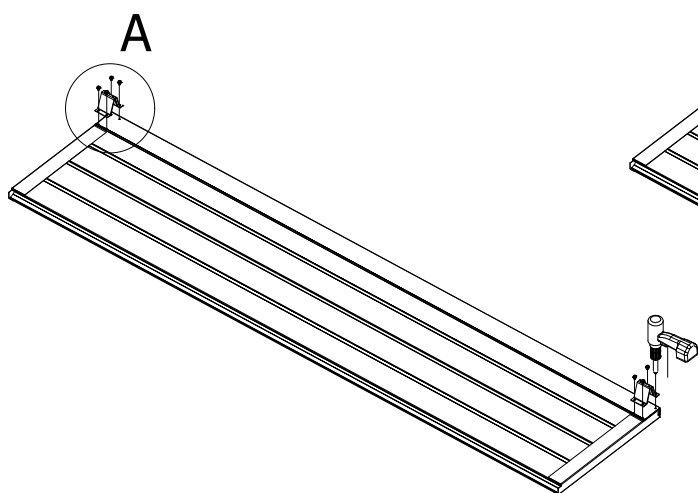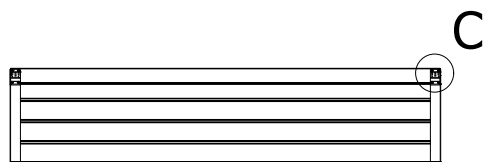

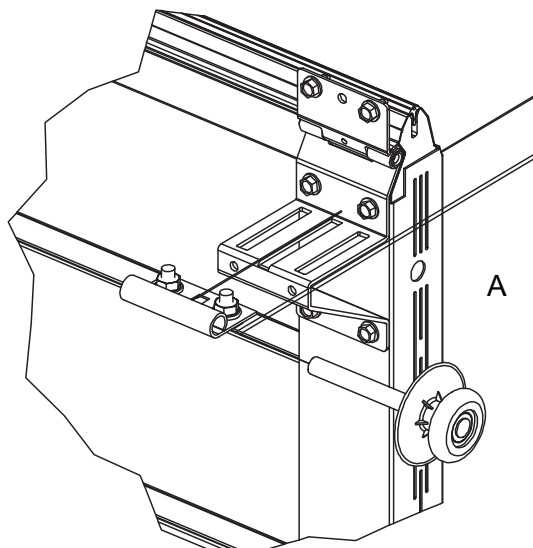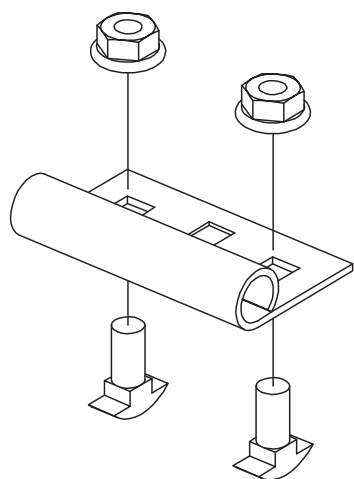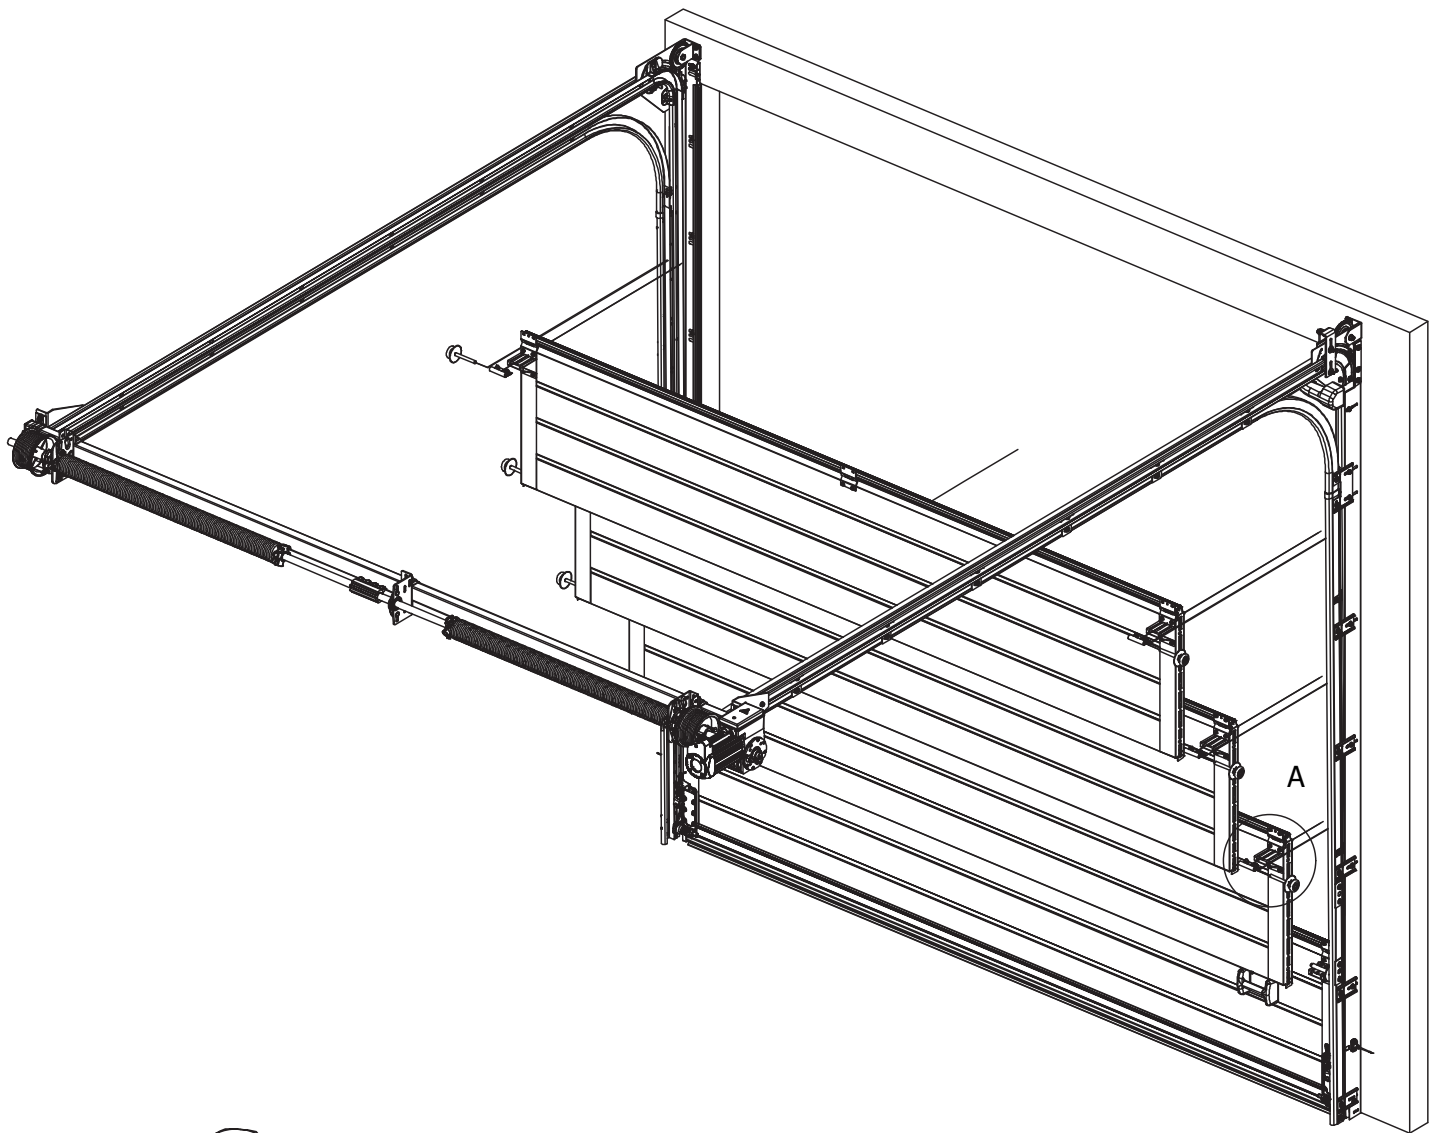


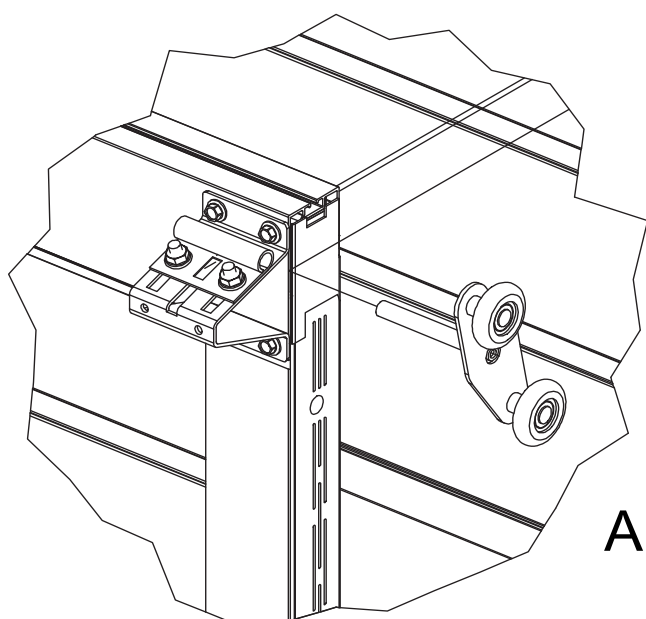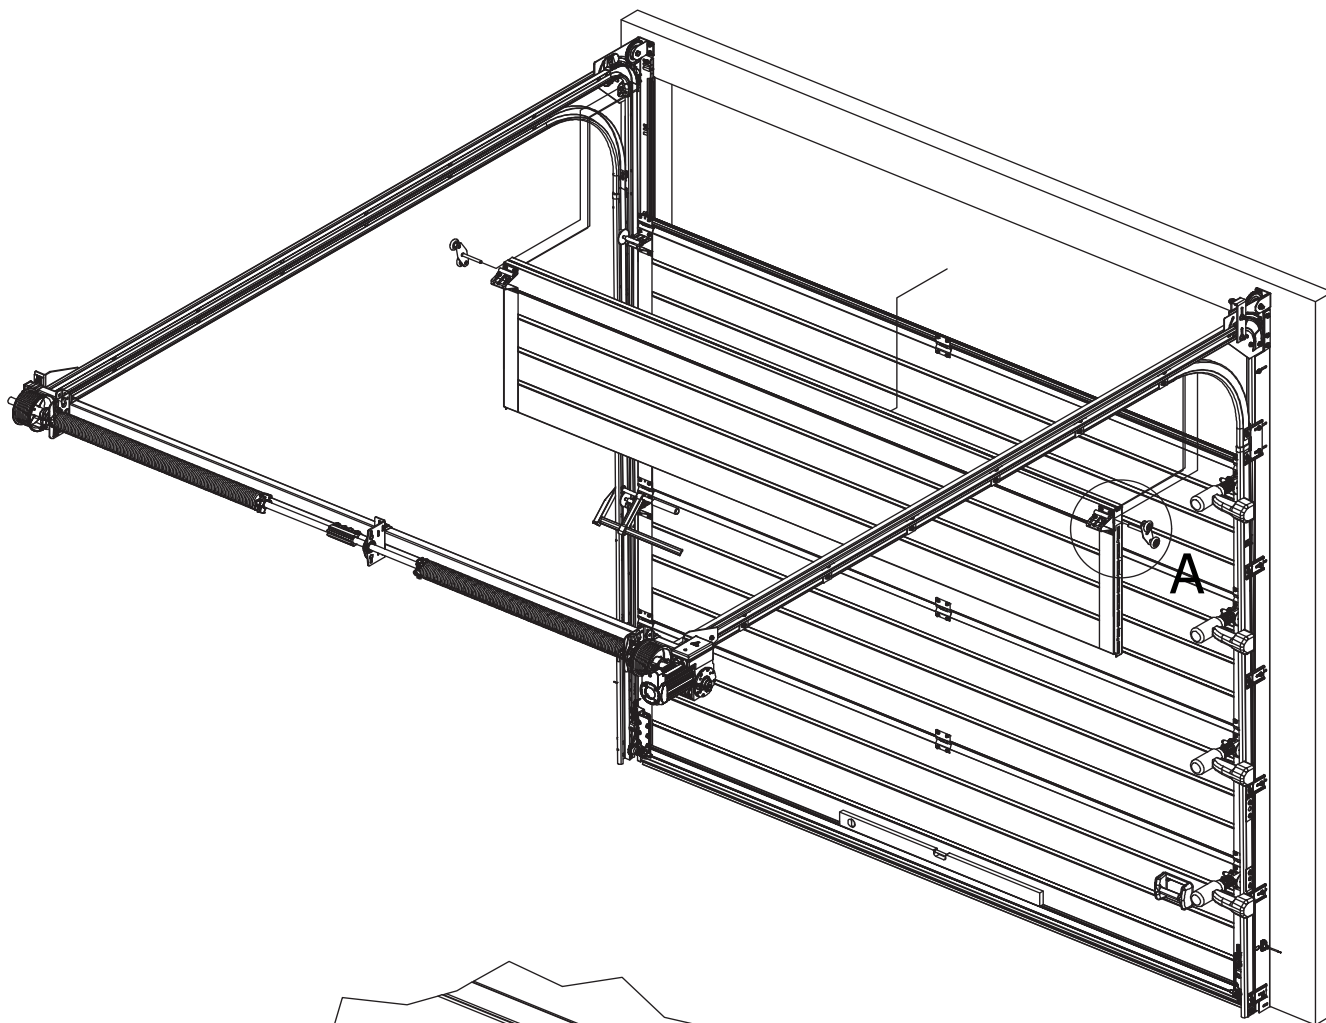

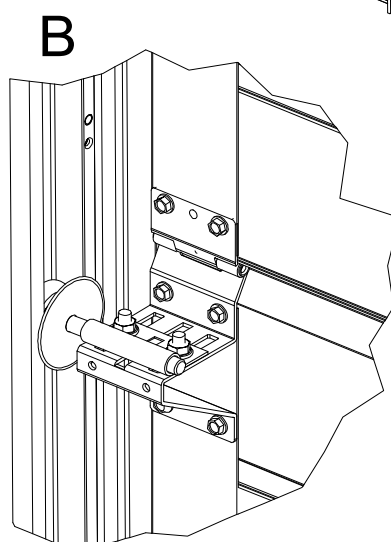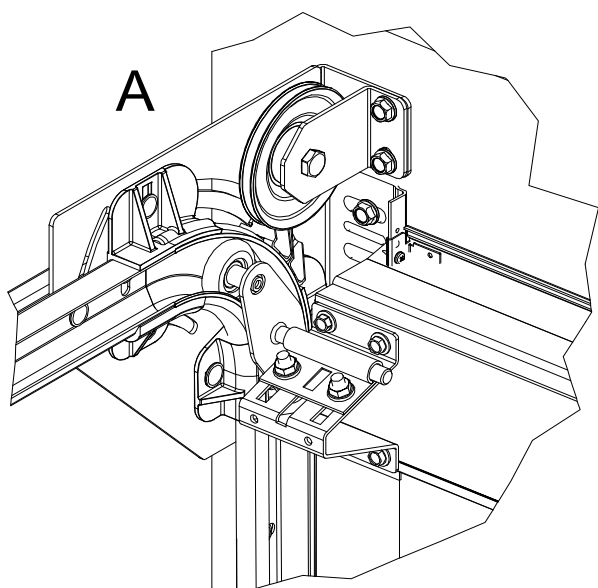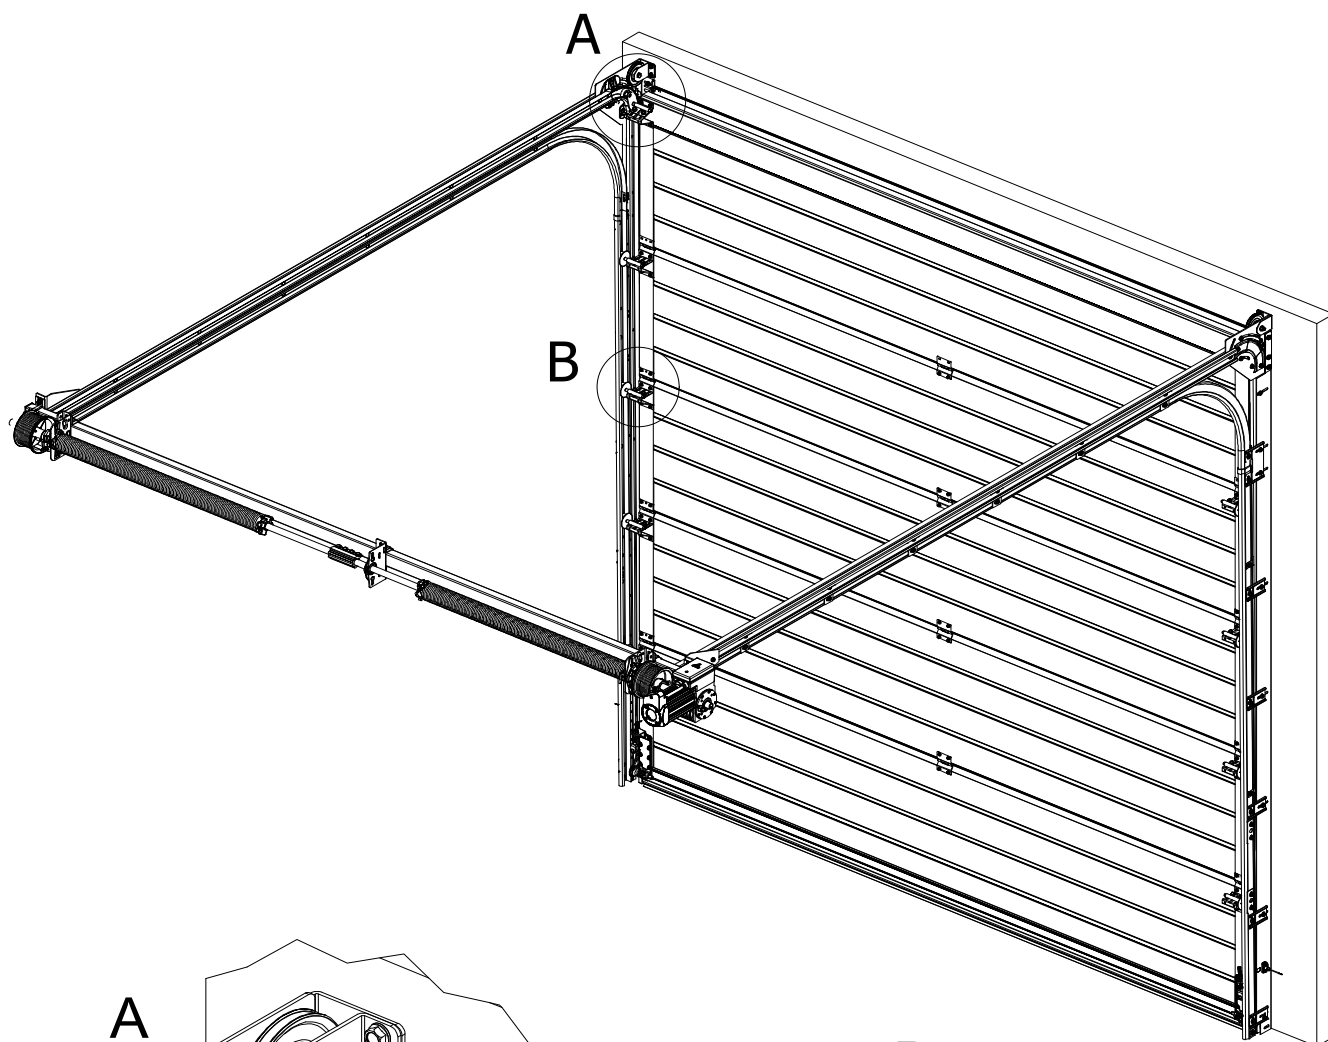


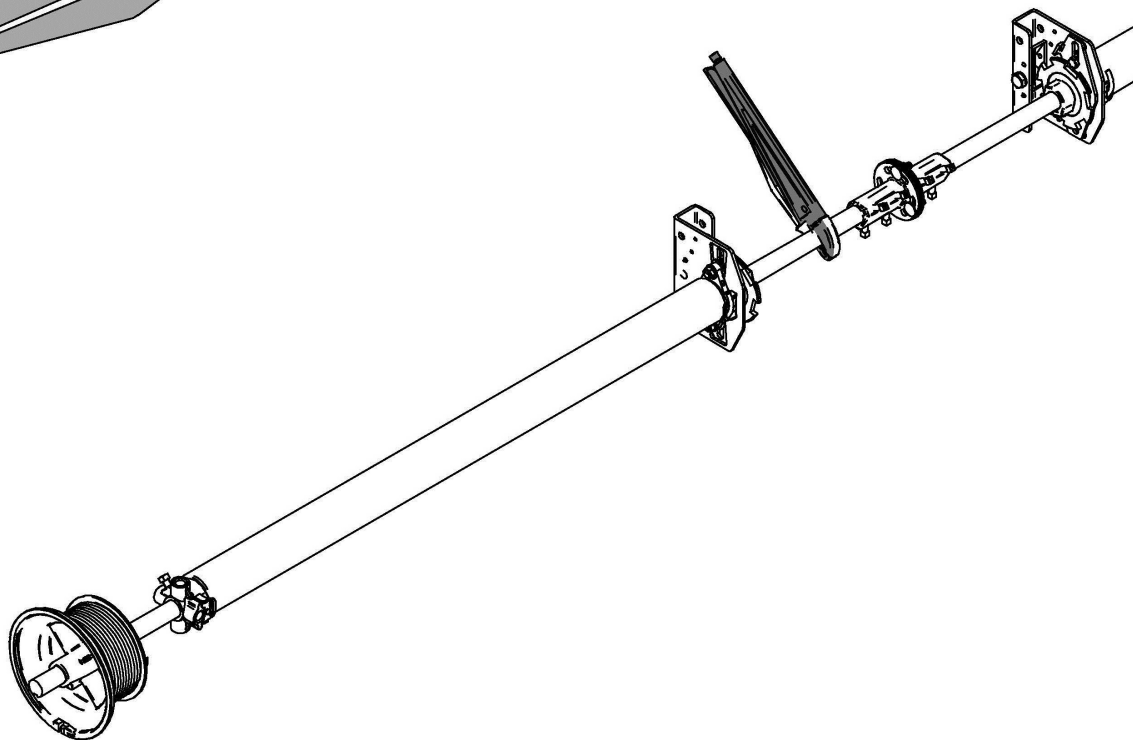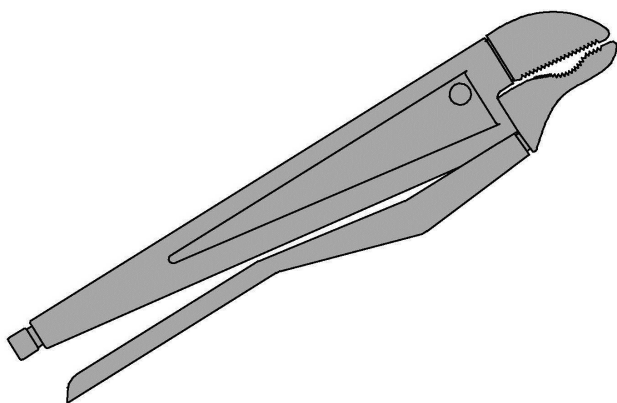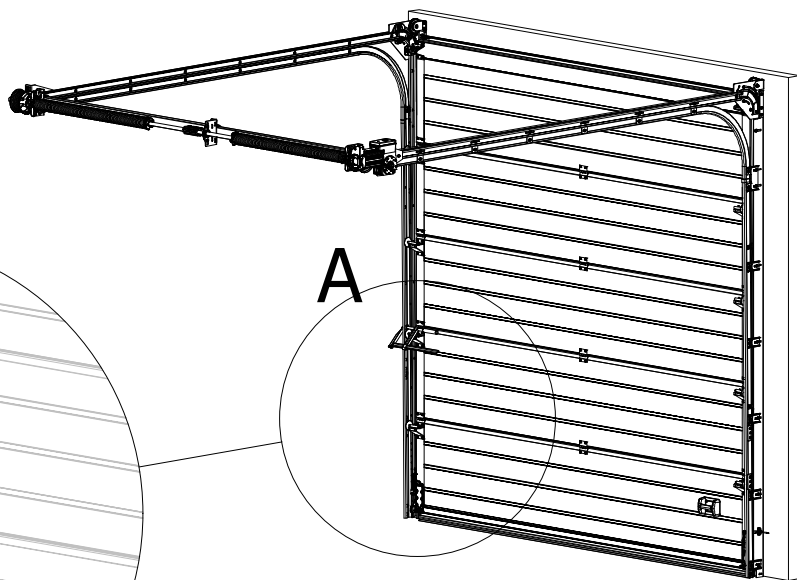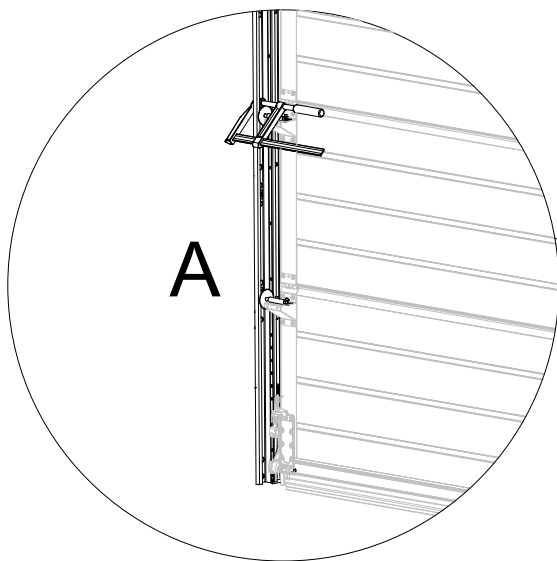


1

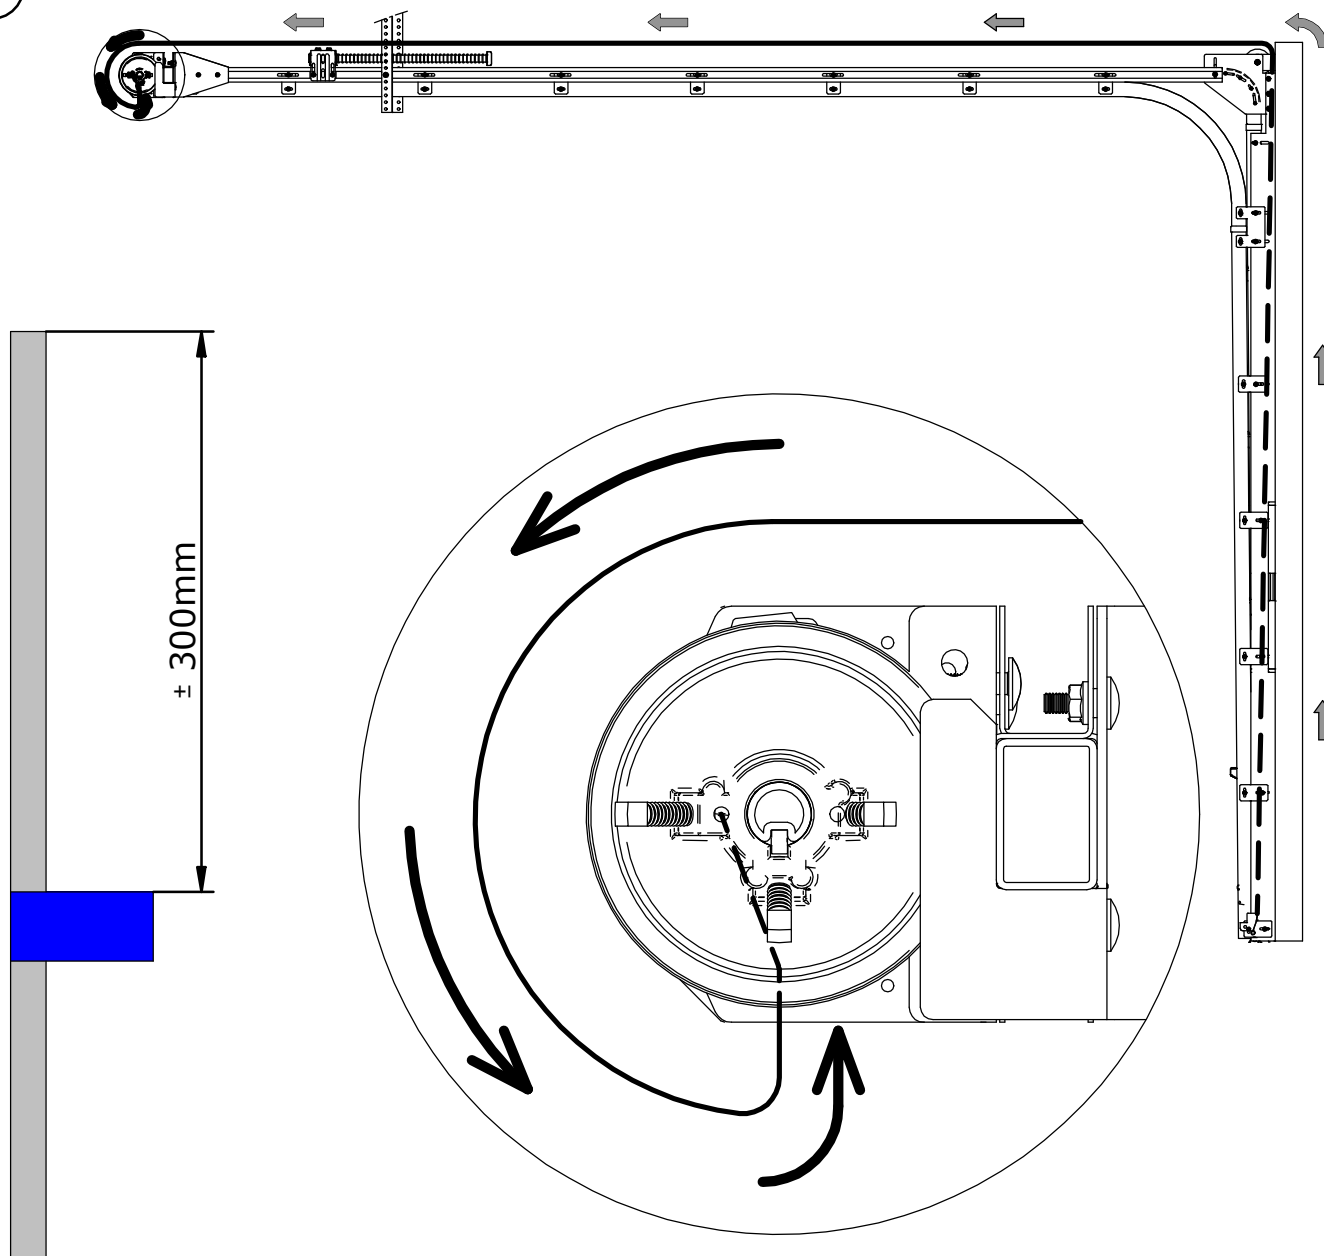




2

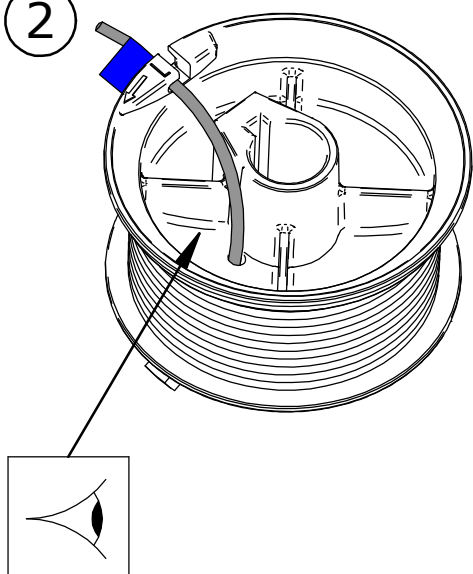

3

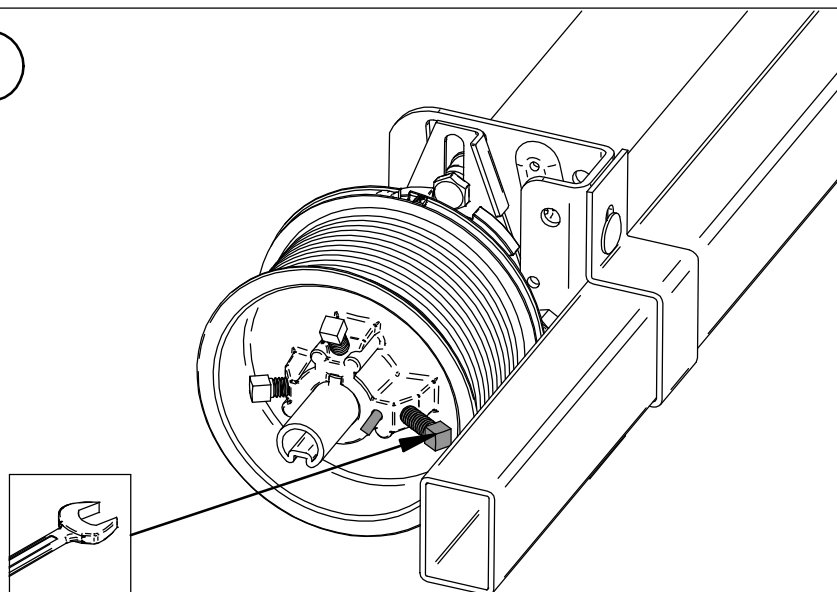

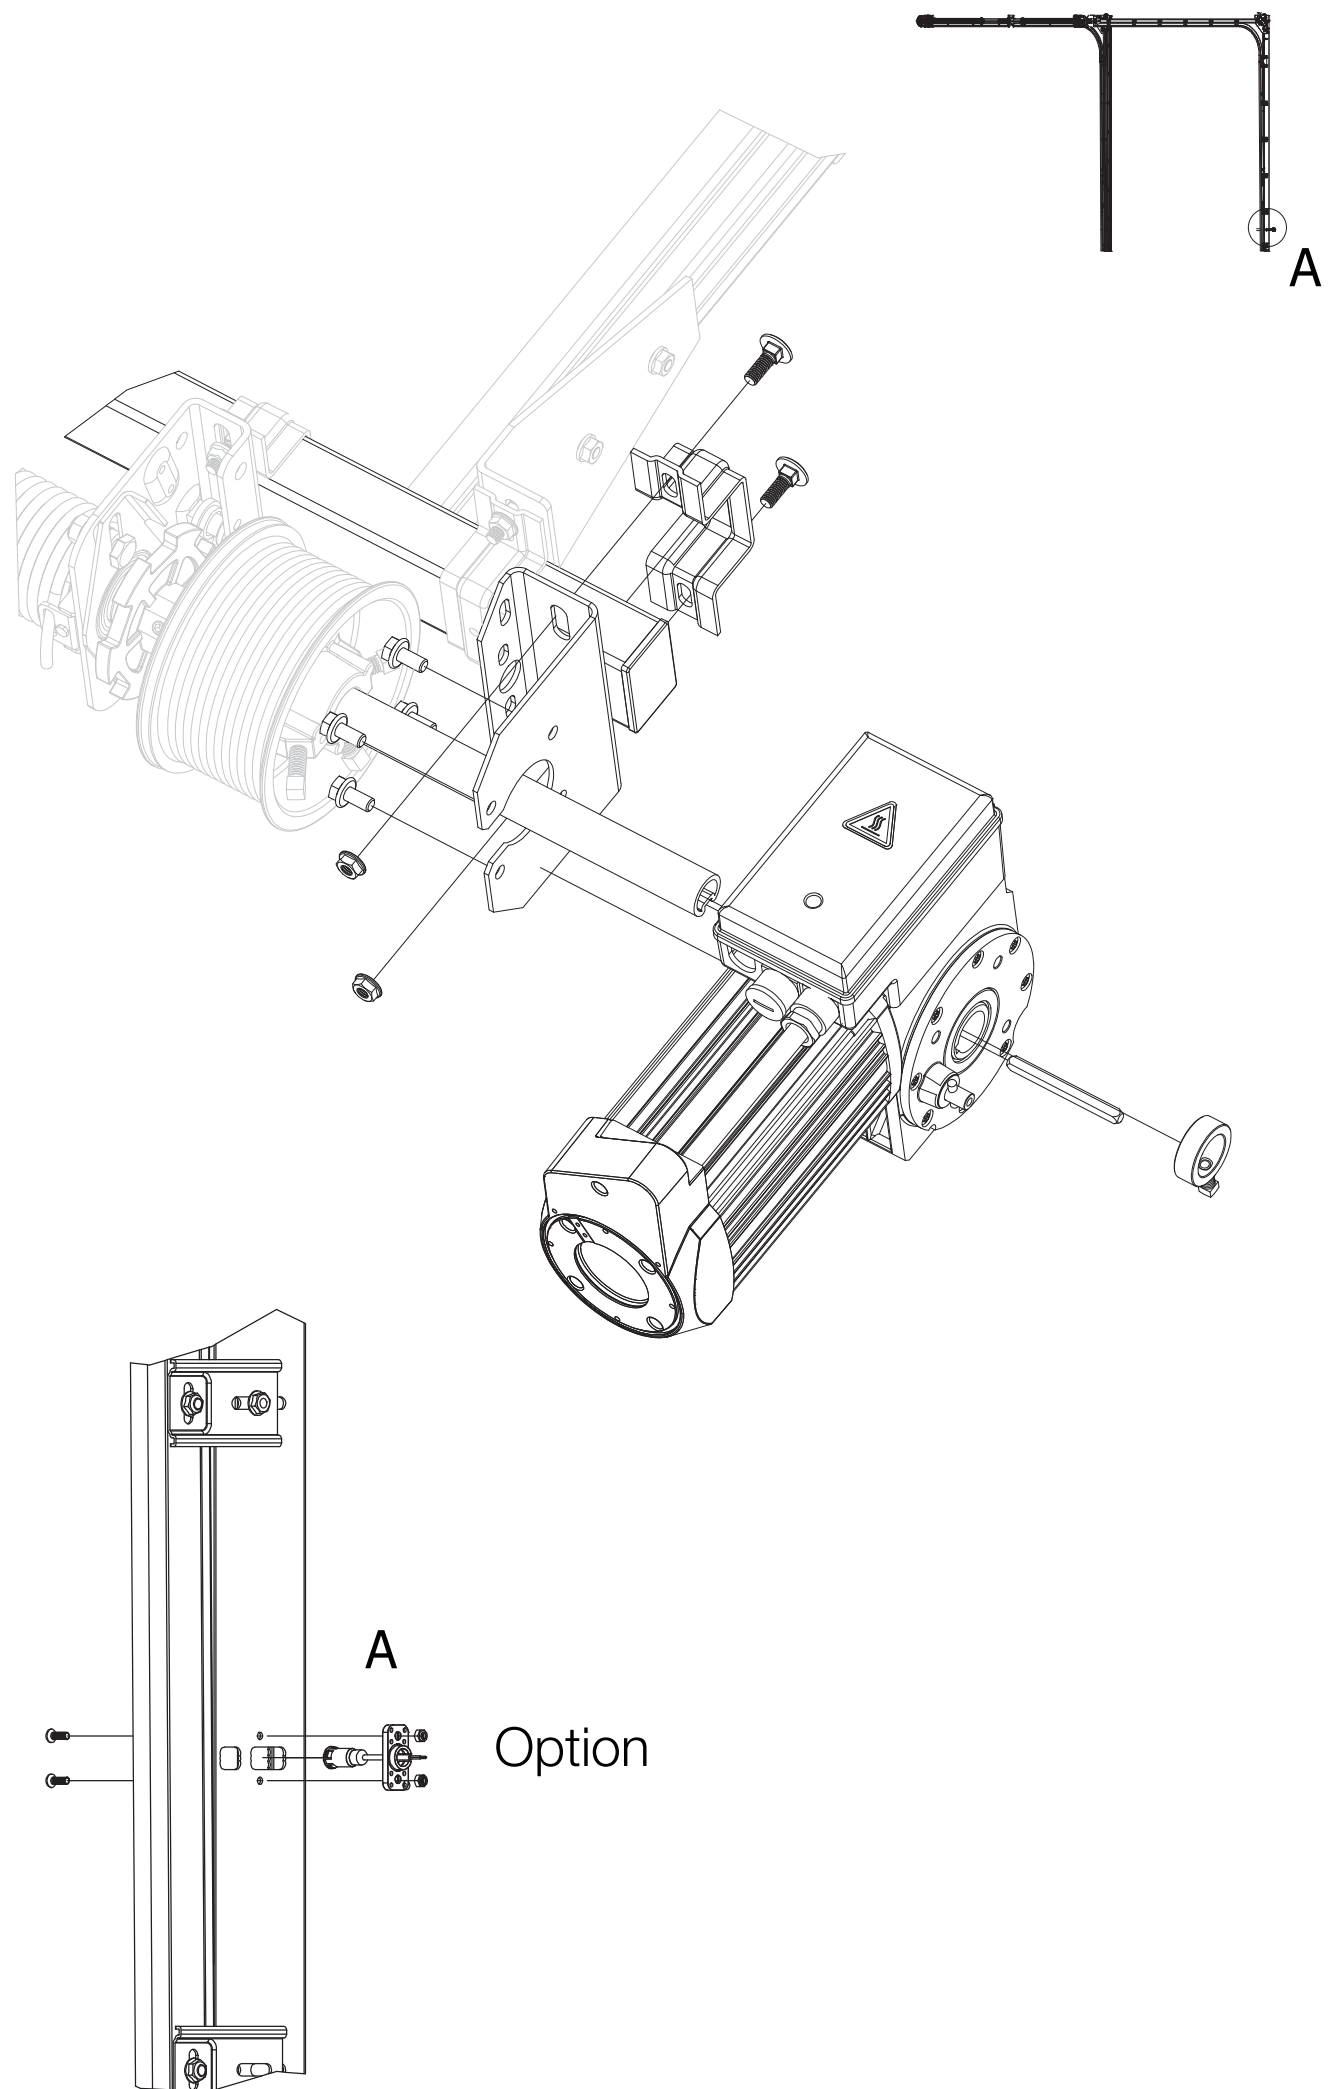



Turns x 360°

PW 12 Bon Hardware Industrie

Pitch Hilift

0

0

E

Aant Deurtype

DMB

DMH

Secies

Velden

Beslag

Gewicht

Turns

Klant

Klant


referentie:

Transport


Aant	Eenheid	Art. nr.	Artikel omschrijving	Doos	Lengte	Verpakt / Controle
1	-		Springs Left 6,00x51x950 Powdercoated			☐ ☐
1	-		Springs Right 6,00x51x950 Powdercoated			☐ ☐



FJEDER / VEER / FEDER / SPRING < 152 mm




FJEDER / VEER / FEDER / SPRING < 67 mm




STÅL / STAAL / STAHL / STEEL


1

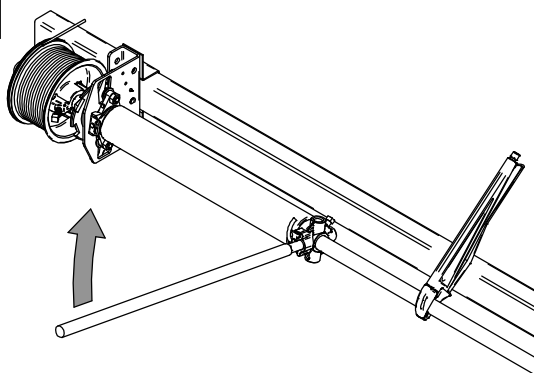



2

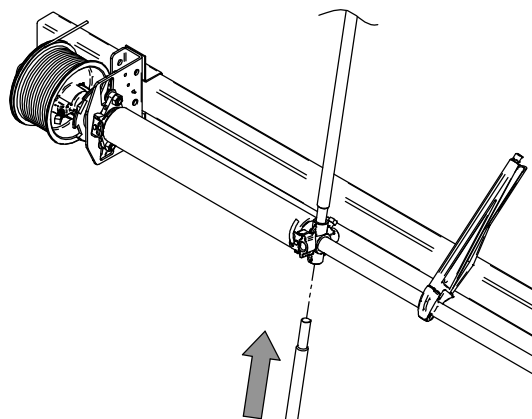

3

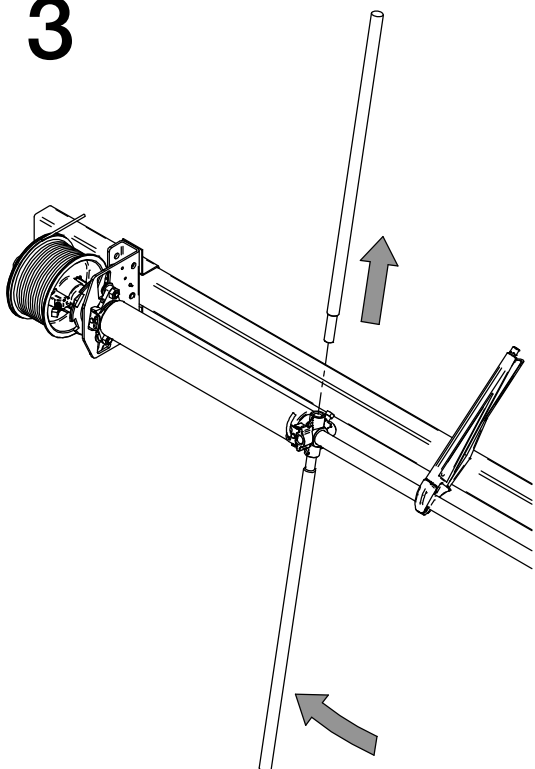

4

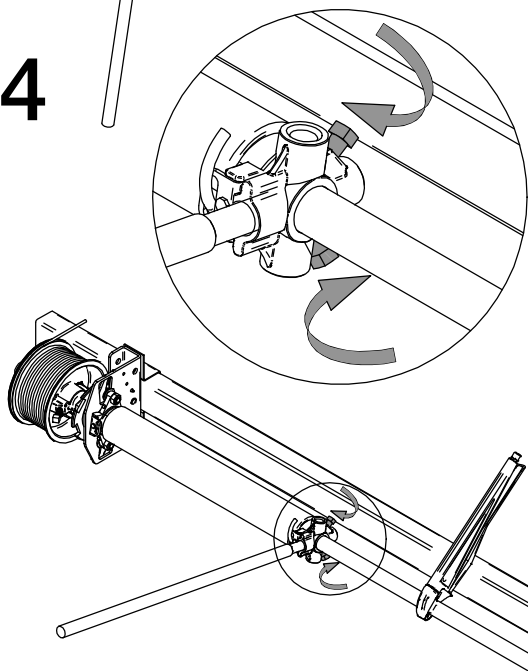




DK: Korrekt placering af bolte



SE: Korrekt fassättning av lindningsplugg



EN: Correct fastening of winding plug


DE: Richtige montage Feder spannkopf



NL: Correcte wijze vastzetten van spankop

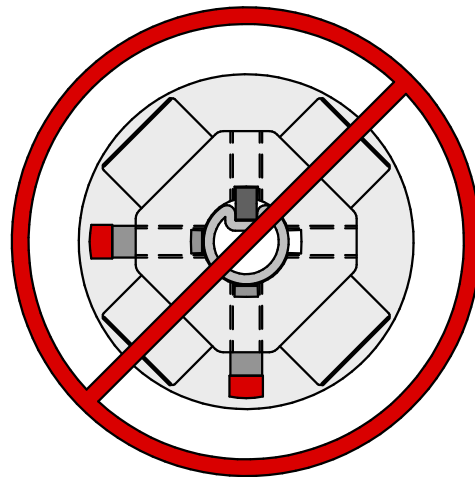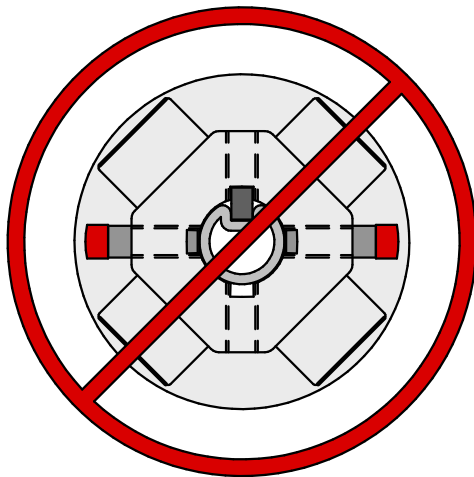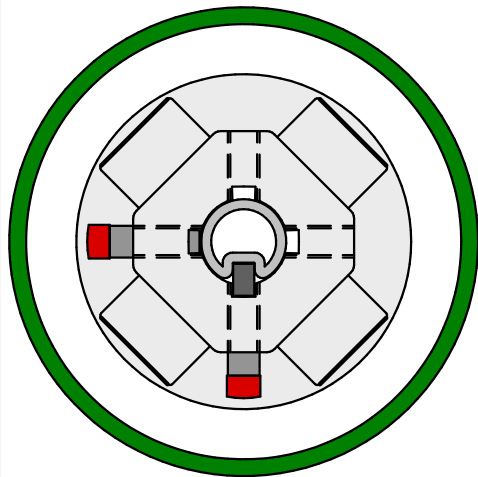


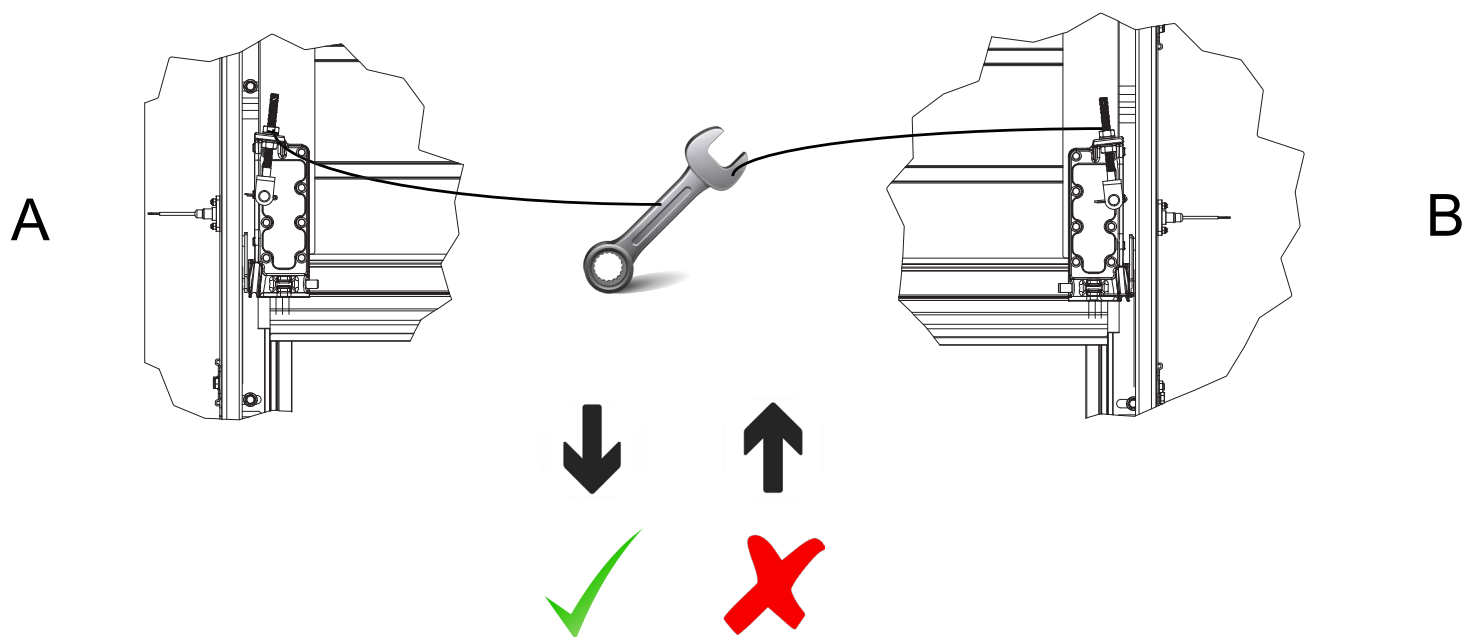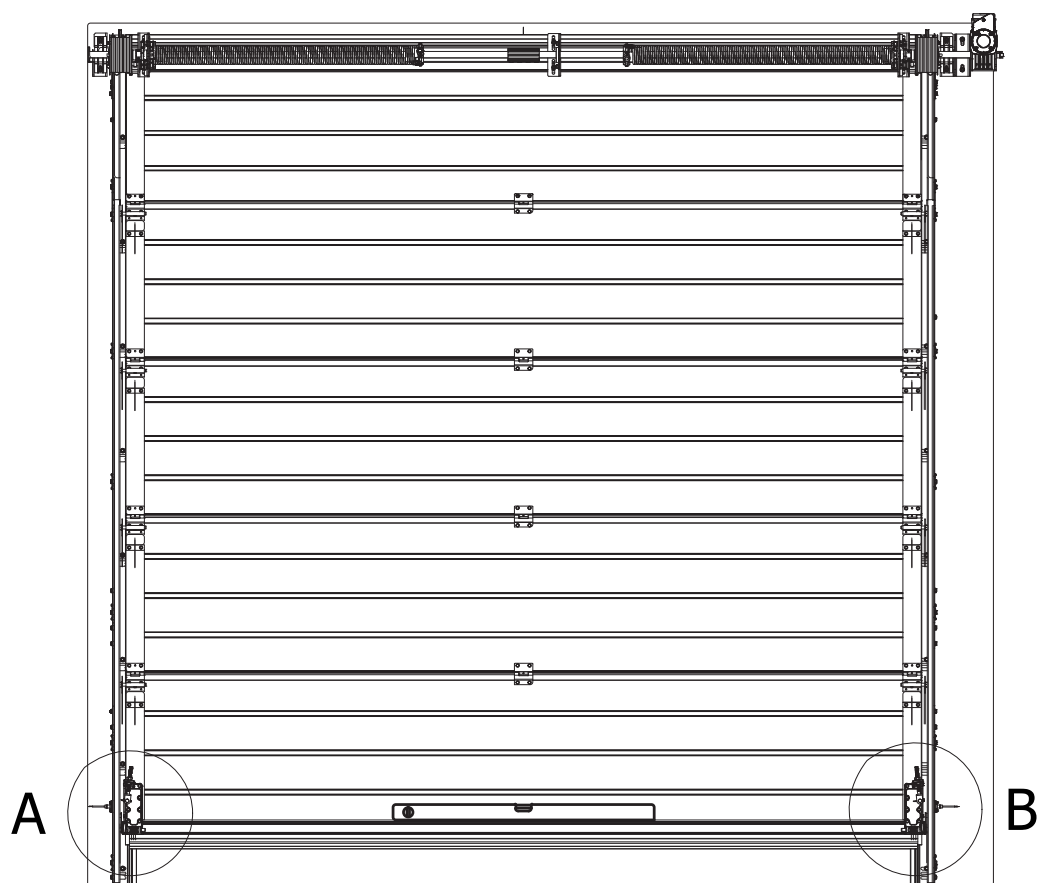

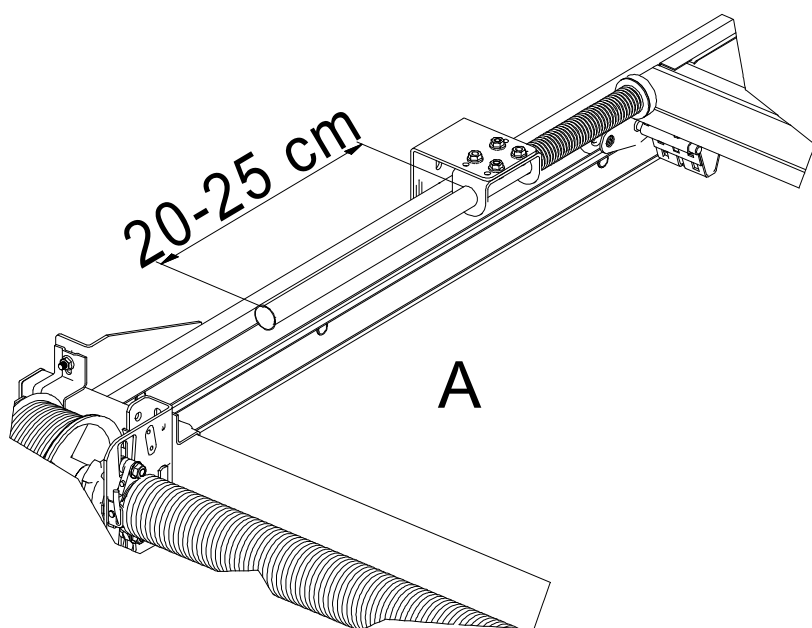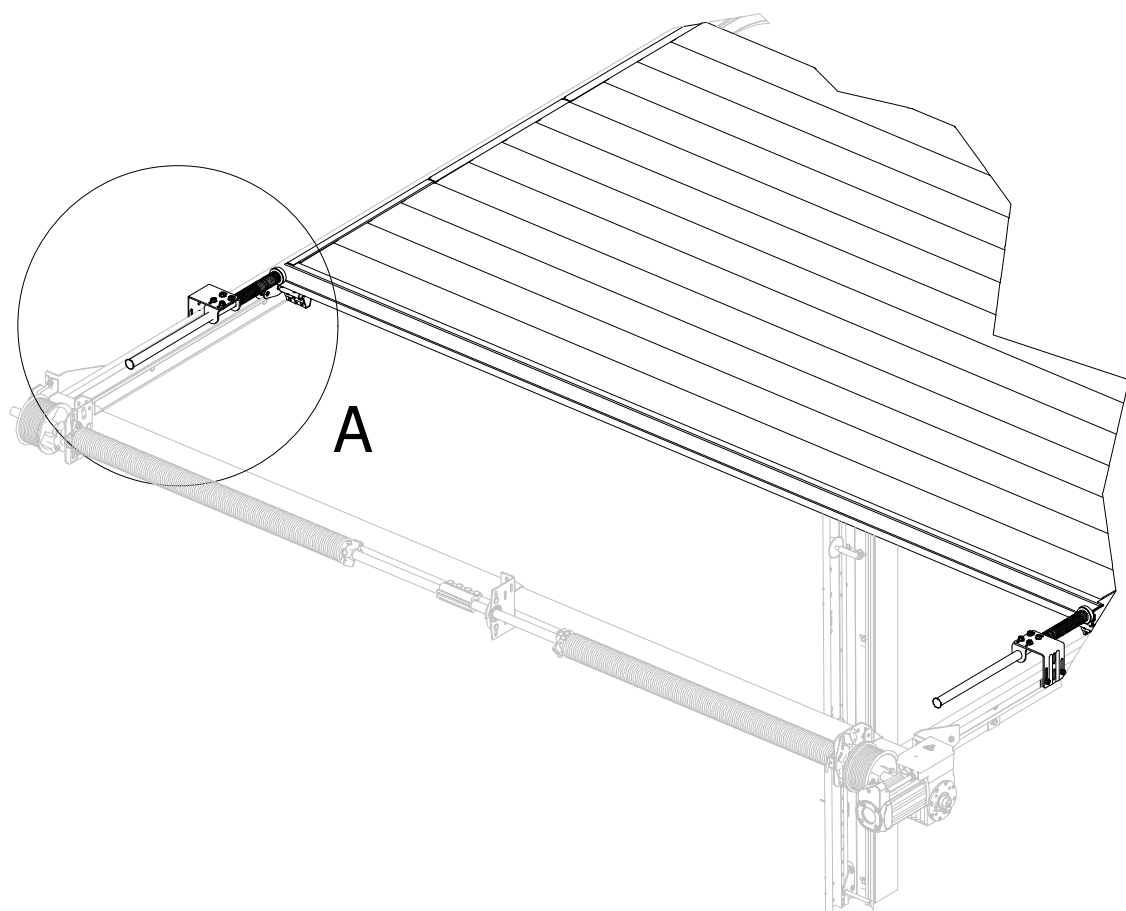

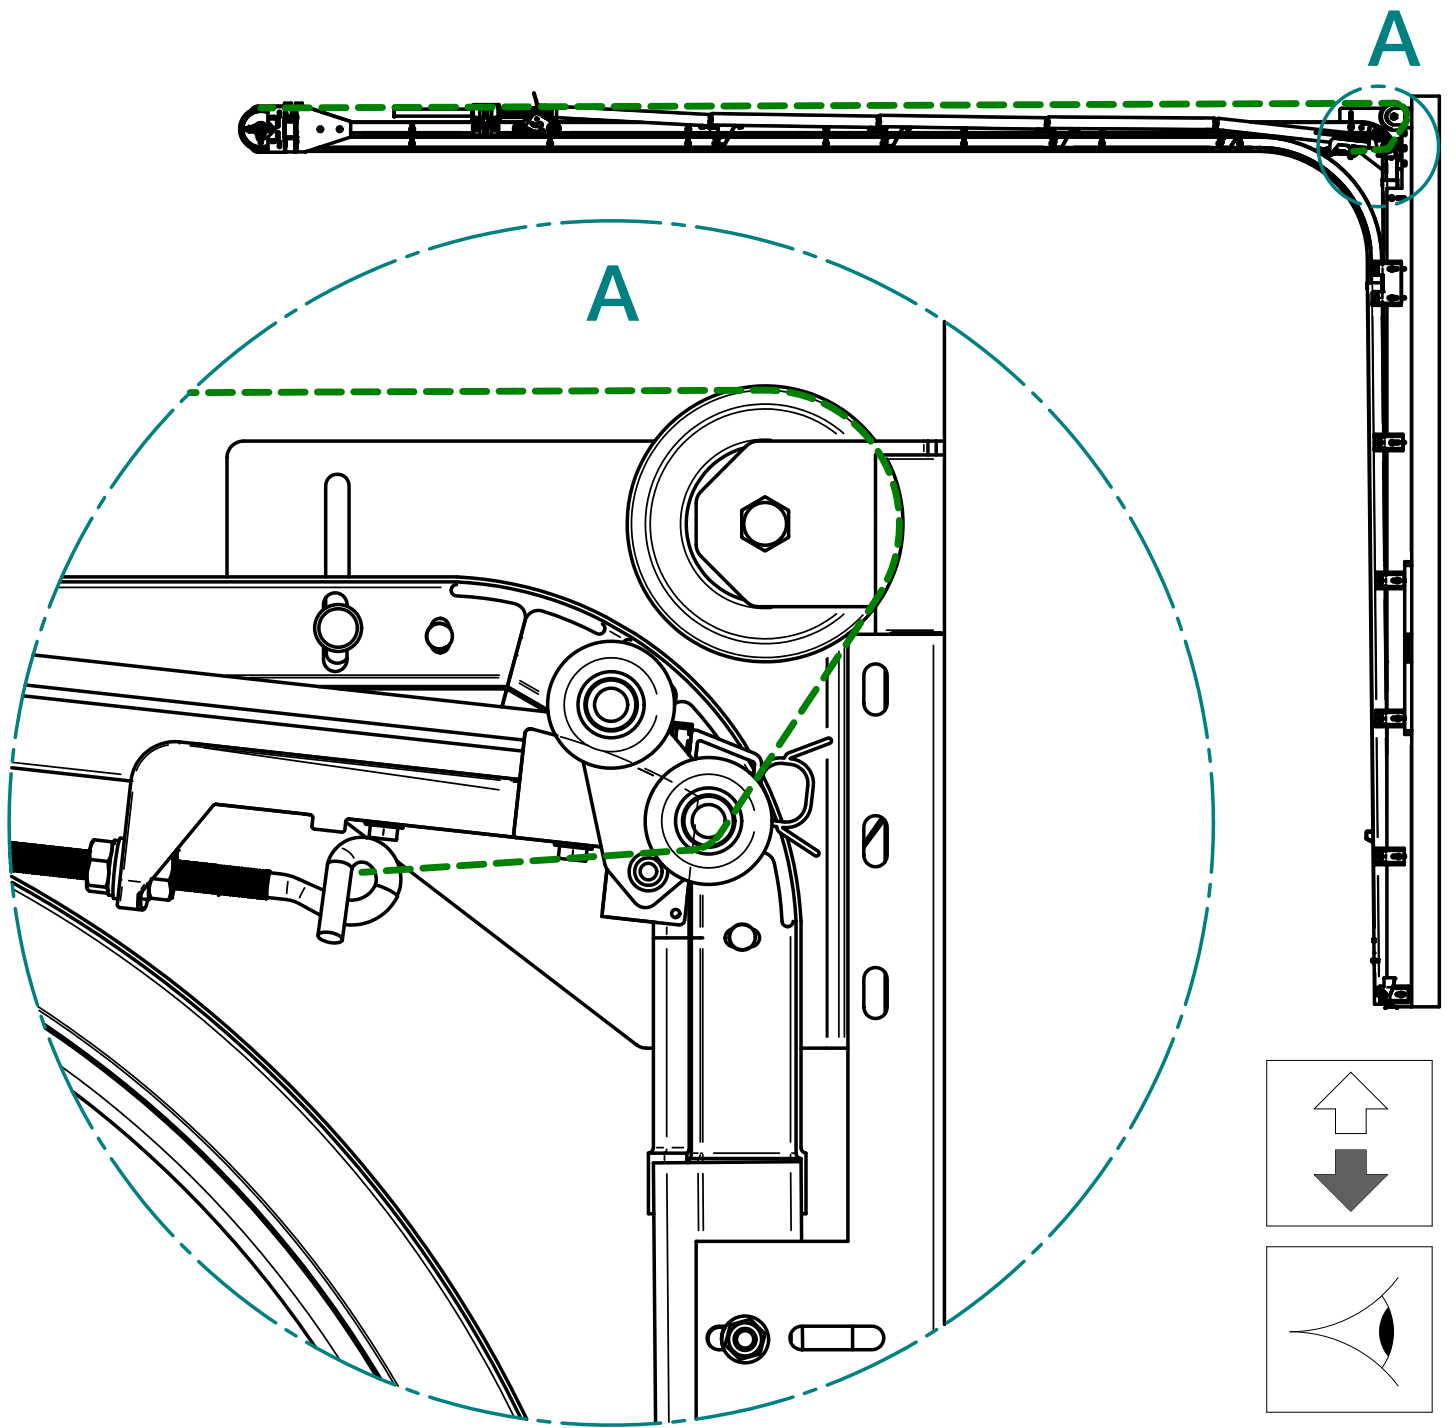


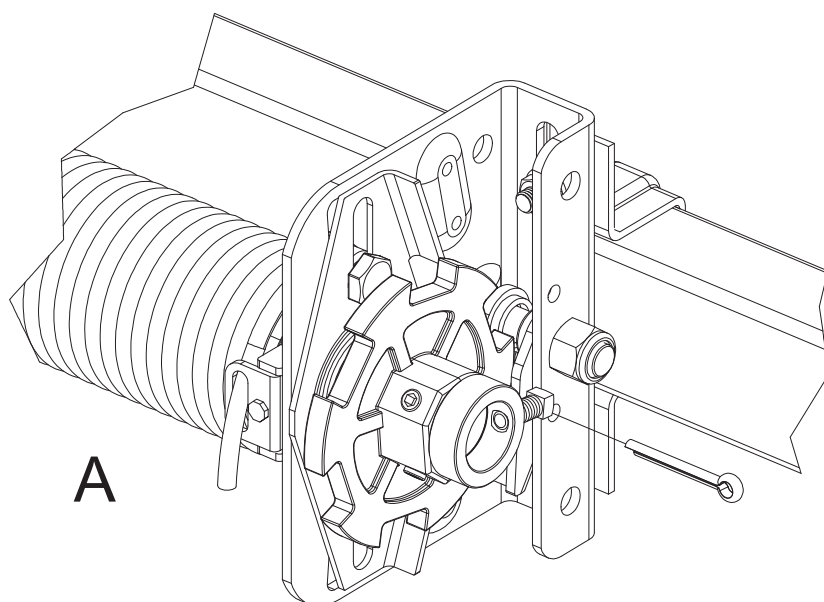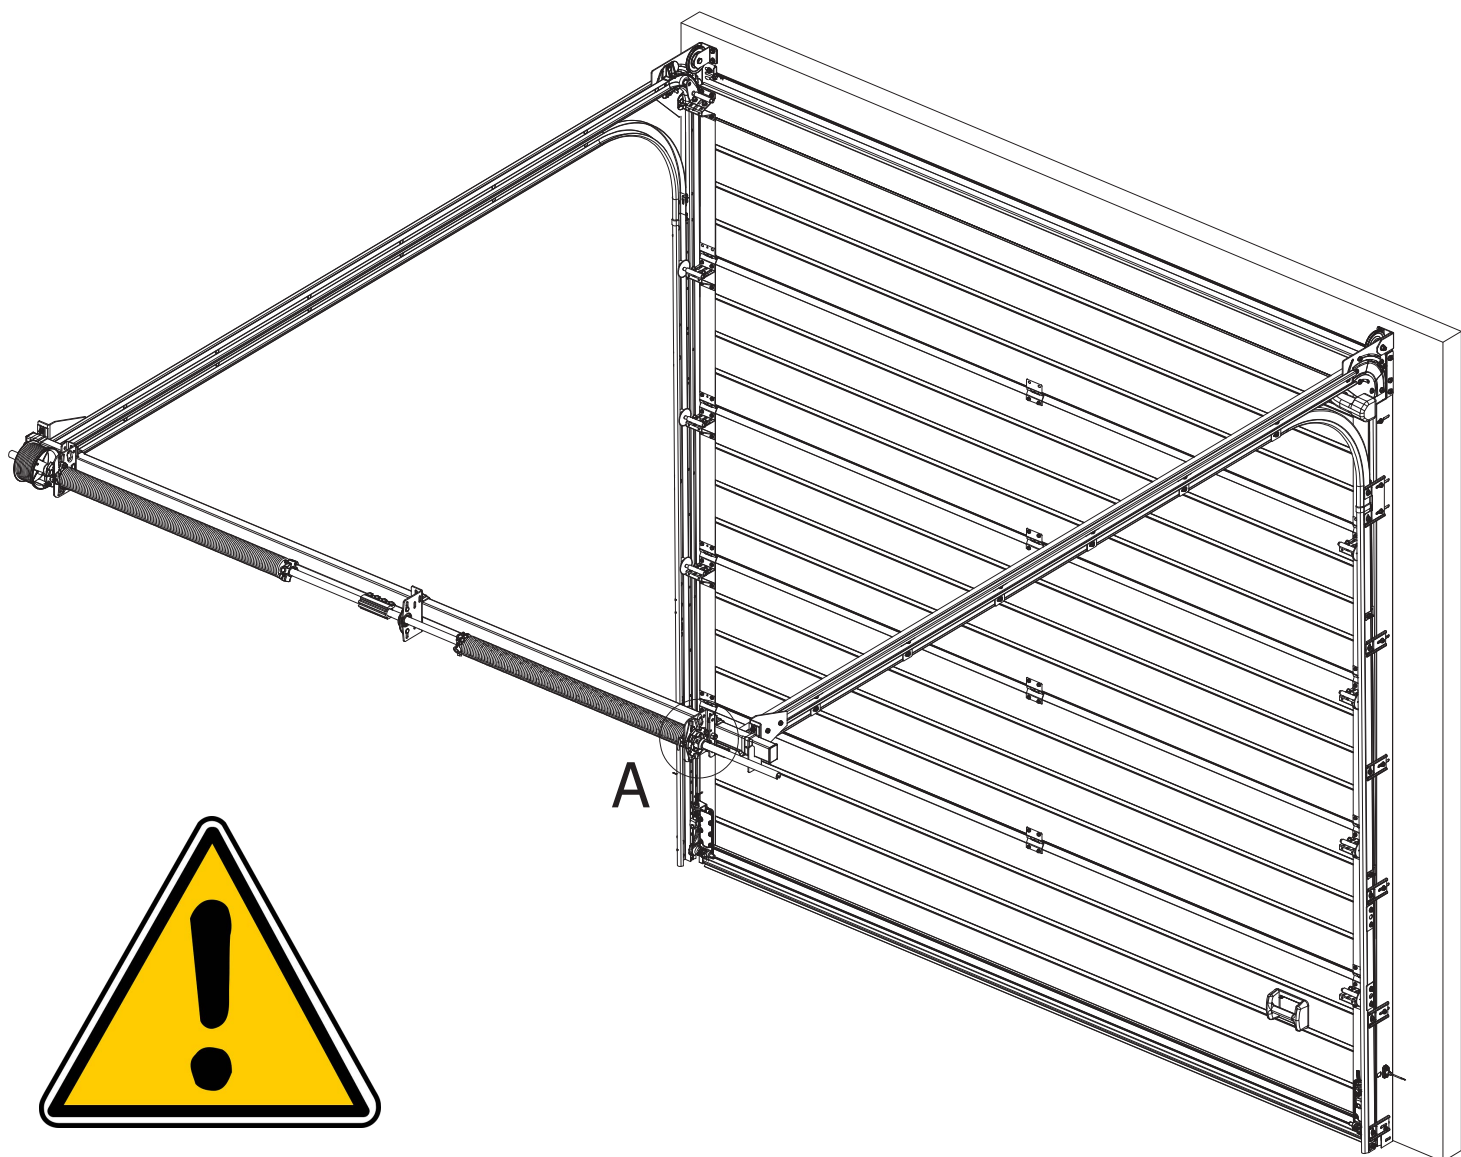

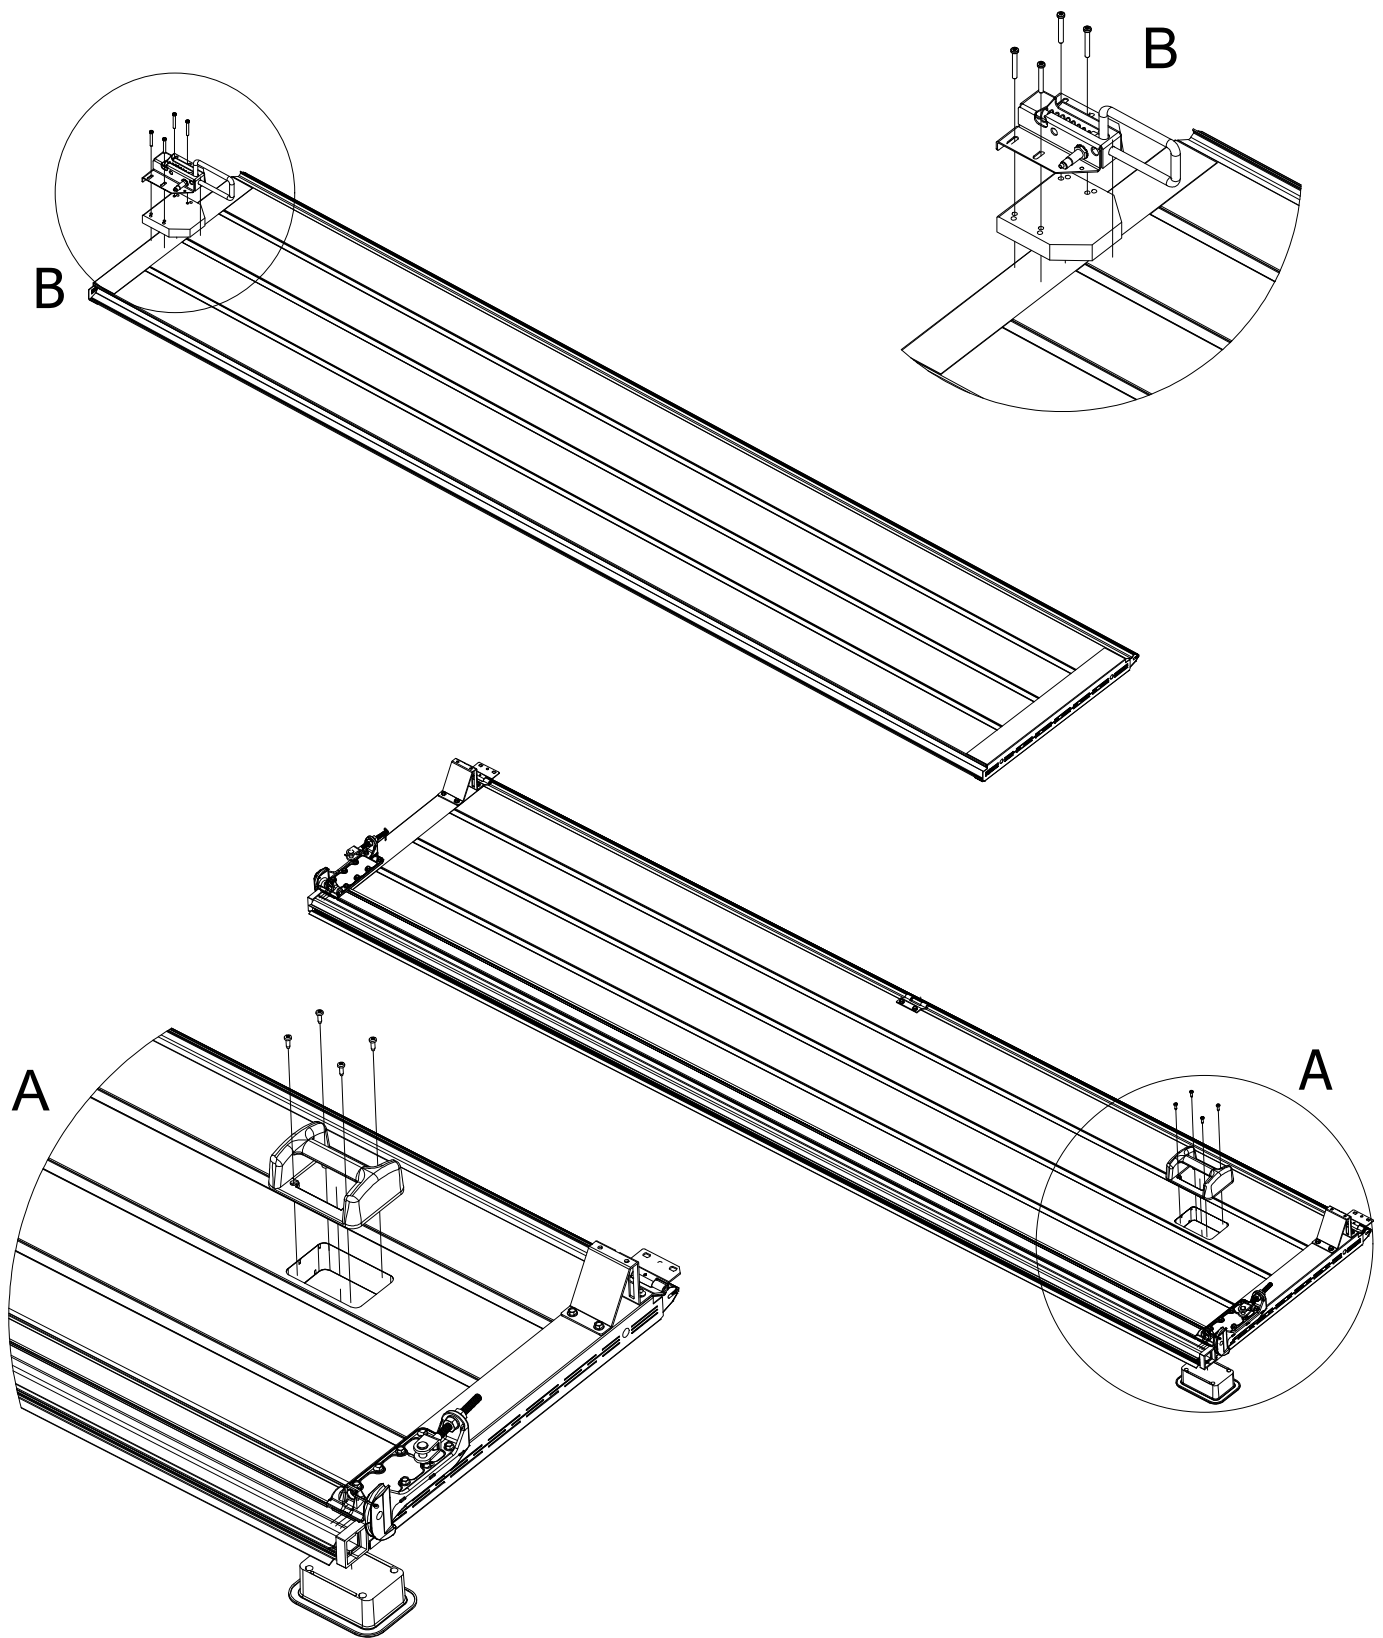


Option SCD


Parts

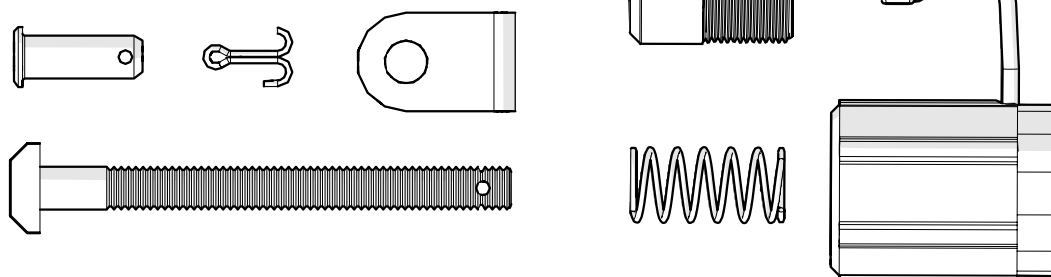


1

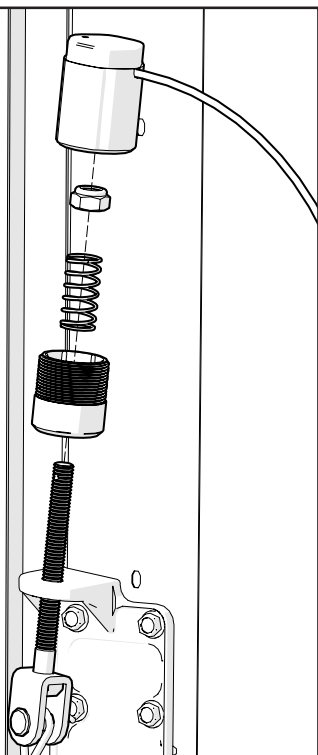

2



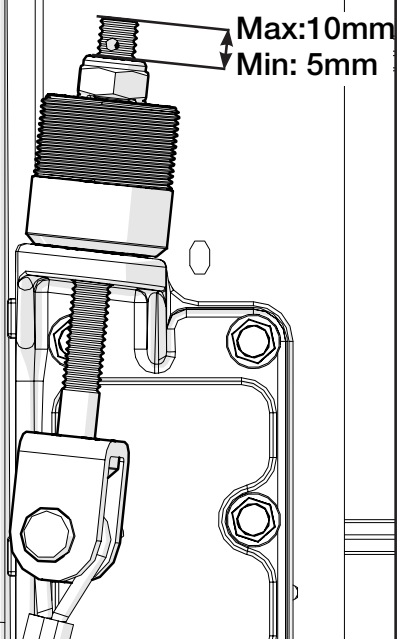


3

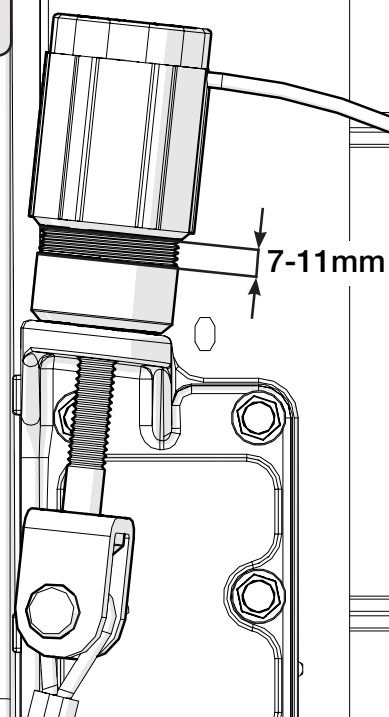

Check

NC-Switch

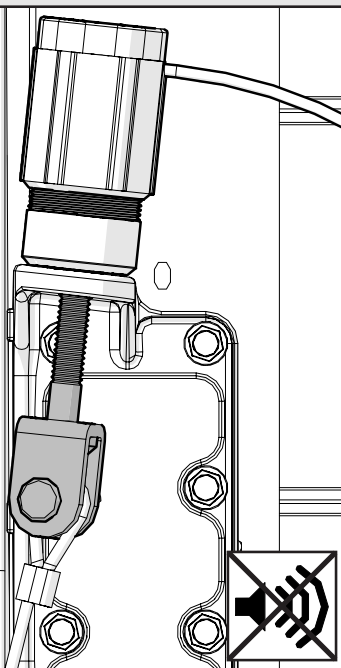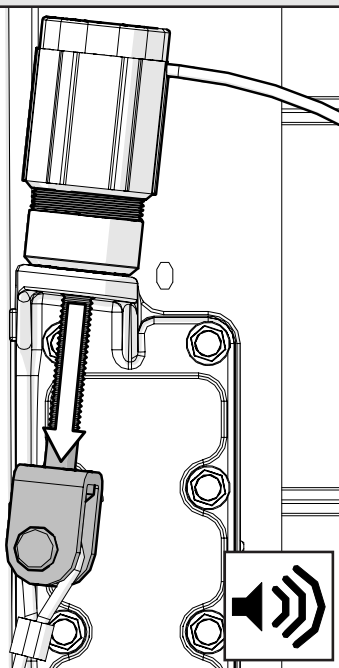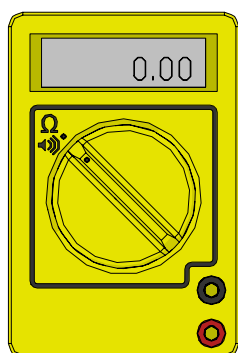

Notes: _____

31



Good Thinking

At Lindab, good thinking is a philosophy that guides us in everything we do. We have made it our mission to create a healthy indoor climate – and to simplify the construction of sustainable buildings. We do this by designing innovative products and solutions that are easy to use, as well as offering efficient availability and logistics. We are also working on ways to reduce our impact on our environment and climate. We do this by developing methods to produce our solutions using a minimum of energy and natural resources, and by reducing negative effects on the environment. We use steel in our products. It's one of few materials that can be recycled an infinite number of times without losing any of its properties. This means less carbon emissions in nature and less energy wasted.

We simplify construction